

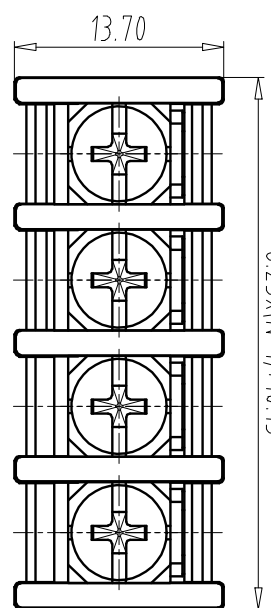


FILE: 2021-D01VULO


8.25x(N-1)+10.15



15.20

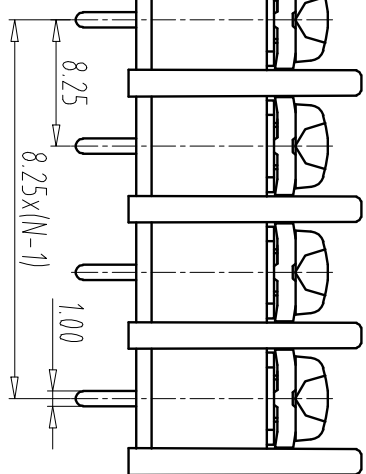

3.10



0.80

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	20A	-	10A
Rated Voltage	300V	-	300V

2 Wire range: 12~22AWG
IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	60KV
Rate Voltage(KV)	320V
Rate Current(A)	24A

2 Wire range: 0.5-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Screw: Steel(M3/Ni Plated)
- 3.Solder Pin: Brass(Tin Plated)

NOTES3:

- 1.Pitch: 8.25mm Poles: 02-24P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO-TB43 - 35S/B - XXP - Y 100A

Certificate Factory poles
Series NO. Code

Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											

over	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.06.15	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP	DATE	NAME	ULO-TB43-35S/B-XXP-Y100A		
NINGBO ULO ELECTRONICS CO.,LTD.				DWGNO	UL0TB43Y100A