

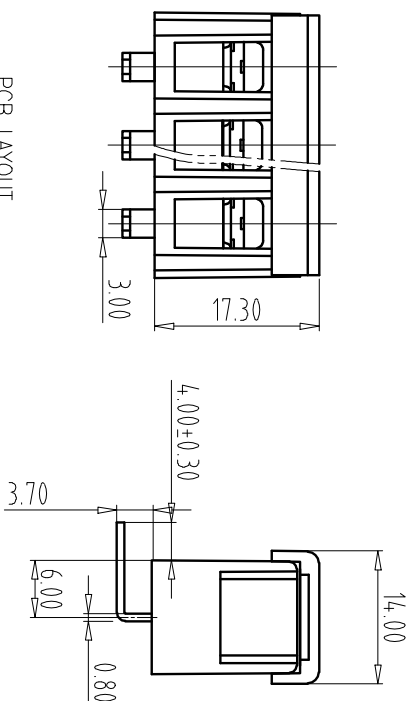




NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	150V	300W

2. Wire range: 22~14AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	5.0K
Rate Voltage(V)	300V
Rate Current(A)	24A

NOTES:

1.Housing: PA66(UL94V-0)

2.5Screw: Steel(M3/Ni Plated)

3.Pin header: Copper alloy(M3/Sn Plated)

4. Cover: PC(UL94V-2)

NOTES:

1.Pitch: 8.25mm Poles: 02-24P

2.Stripping length: 8mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB43	-	38R/B	-	XXP	-	Y	100A
----------	---	-------	---	-----	---	---	------

Certificate Factory poles

Series NO.	Code
------------	------

Customer requirements

—color:

1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE		
DWG.	LZW		DATE		21.05.31	UNITS		MM	SHEET/OF	1/1
CHK			DATE			SCALE		1 : 1	A4	
APP.			DATE			UL0-1BA3-3BR/B-XP-Y100A				
NINGBO UL0 ELECTRONICS CO.,LTD.										
 宁波欧路电子有限公司					NAME		UL01BA3Y100A			
					DWGNO					