
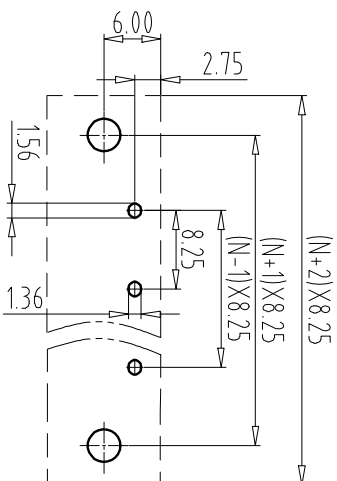

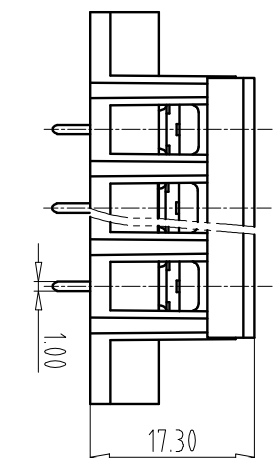


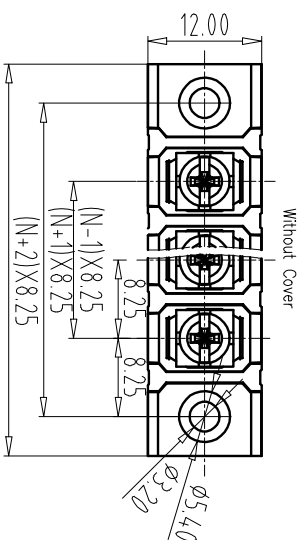

Use group	B	C	D
Rated Current	15A	15A	10A
Rated Voltage	300V	150V	300V

2. Wire range: 22~14AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	5.0kV
Rate Voltage(V)	300
Rate Current(A)	24A

NOTES:

1.Housing: PA66(UL94V-0)

2.5Screw: Steel(M3/Ni Plated)

3.Pin header: Copper alloy(M3/Sn Plated)

4. Cover: PC(UL94V-2)

NOTES3

1.Pitch: 8.25mm Poles: 02-24P

2.Stripping length: 8mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

UL0-TB43	-	38S/A	-	XXP	-	Y	100A
----------	---	-------	---	-----	---	---	------

Certificate Factory poles

Series NO.	Code
------------	------

Customer requirements

color

1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange

A	Total Pitch Tolerances	Nominal dimension range	=	-	//
---	------------------------	-------------------------	---	---	----

low friction lubricants in mm	nominal dimension range in mm	T	≡	—	//
----------------------------------	----------------------------------	---	---	---	----

0.18±0.20	0.25±0.3	0.35±0.44	0.55±0.70	0.75±0.20	0.25±0.30	0.35±0.44	0.55±0.70	0.80±0.90	0.2	0.3	0.2	0.3	0.5
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	30	53	70	90	100
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	150

ITEM	NAME OF PART	NO. OF PART	MATERIAL		NOTE		
			QTY				
DWG.	L Z W	DATE	21.05.31	UNITS	MM	SHEET/OF	1/1
G/K.		DATE		SCALE	1 : 1	A4	
APP.		DATE					

NINGBO ULO ELECTRONICS CO.,LTD.

NAME

ULO-TB43-385/A-XXP-Y100A

ULOTB43Y100A	宁波欧路电子有限公司
DWGN0	

[illegible]

NINGBO UL0 ELECTRONICS CO.,LTD
宁波欧路电子有限公司

DWGNO. ULOTB43Y100A