

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

Use group	B	C	D
1. Rated Current	10A	-	-
Rated Voltage	300V	-	-

2.Wire range: /

IEC Standard





1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2.wire range:/

NOTES2:

- 1.Pitch:5.0mm Poles: 02-24P
- 2.Stripping length:/
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

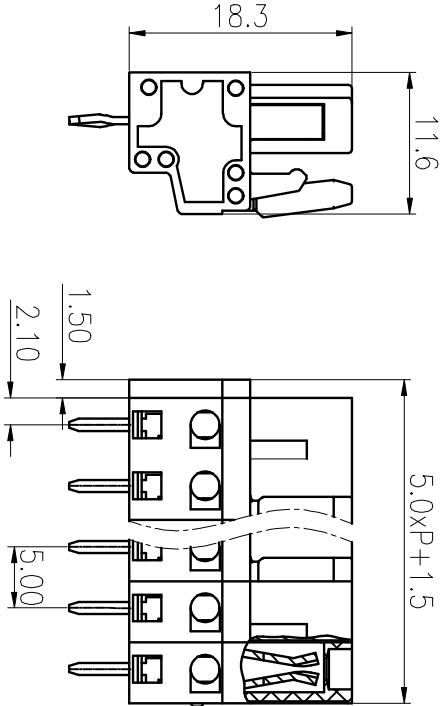

Total Pitch Tolerances		Nominal dimension range		T	≡	—	//
in mm		in mm					

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	100	over	150	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10		100		150			
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4	
APP.	DATE		NAME	ULO-TB440-8B-5.0-XXP		
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	X	



宁波欧路电子有限公司