

FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	10A	—	—
	Rated Voltage	300V	—	—

2.Wire range: /

IEC Standard

1.	Pollution Degree	3
	Overvoltage Category	II
	Rate Impulse Voltage(KV)	4KV
	Rate Voltage(V)	250V
	Rate Current(A)	12A

2.wire range: /


NOTES2:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4.RoHS Compliance

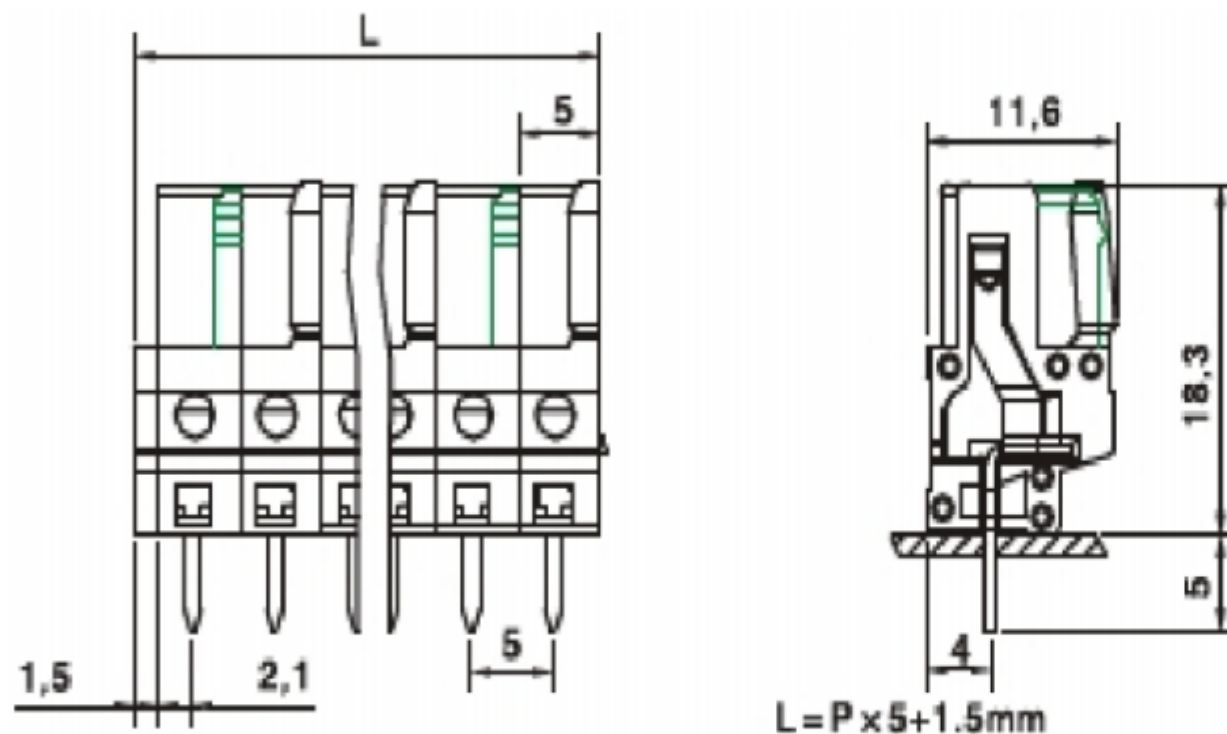

$$L = P \times 5 + 1.5\text{mm}$$

A	Total Pitch Tolerances									Nominal dimension range									$\perp$	$\equiv$	$\parallel$					
	in mm									in mm																
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over						over	over	over
	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250						320	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10				100	150			
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5			

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE			ULO-TB440-8D-5.0-XXP			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME				
				DWGNO.				