


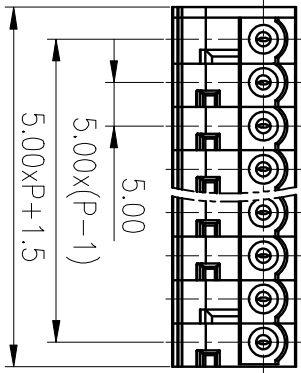

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	15A	-	-
Rated Voltage	300V	-	-

2.Wire range: 24~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	250V
Rate Current(A)	16A

2.wire range: 0.2-2.5mm²




NOTES2:

1.Pitch:5.0mm Poles: 02-24P

2.Stripping length: 8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

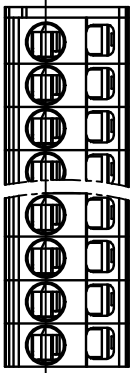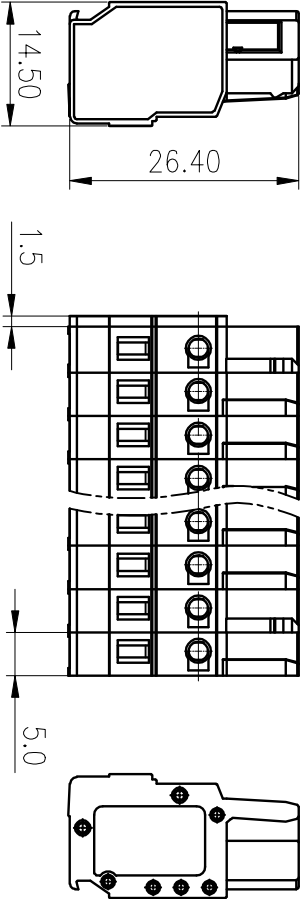

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/			
CHK.	DATE				
APP.	DATE				