


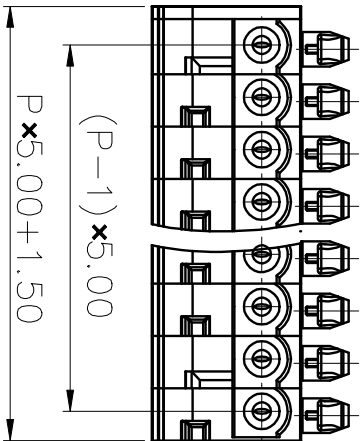

NOTES:

UL Standard

1. Use group B C D

Rated Current 15A — —

Rated Voltage 300V — —

2. Wire range: 24~14AWG

IEC Standard



1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	250V
Rate Current(A)	16A

2. wire range: 0.2-2.5mm²

NOTES2:

1. Pitch: 5.0mm Poles: 02-24P
2. Stripping length: 8-9mm
3. Operating temperature: -40℃~+105℃
4. RoHS Compliance

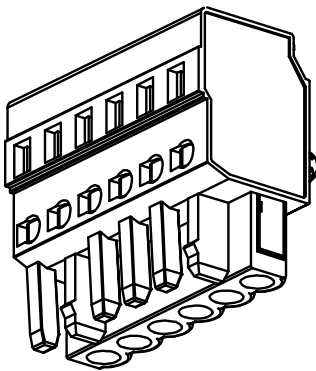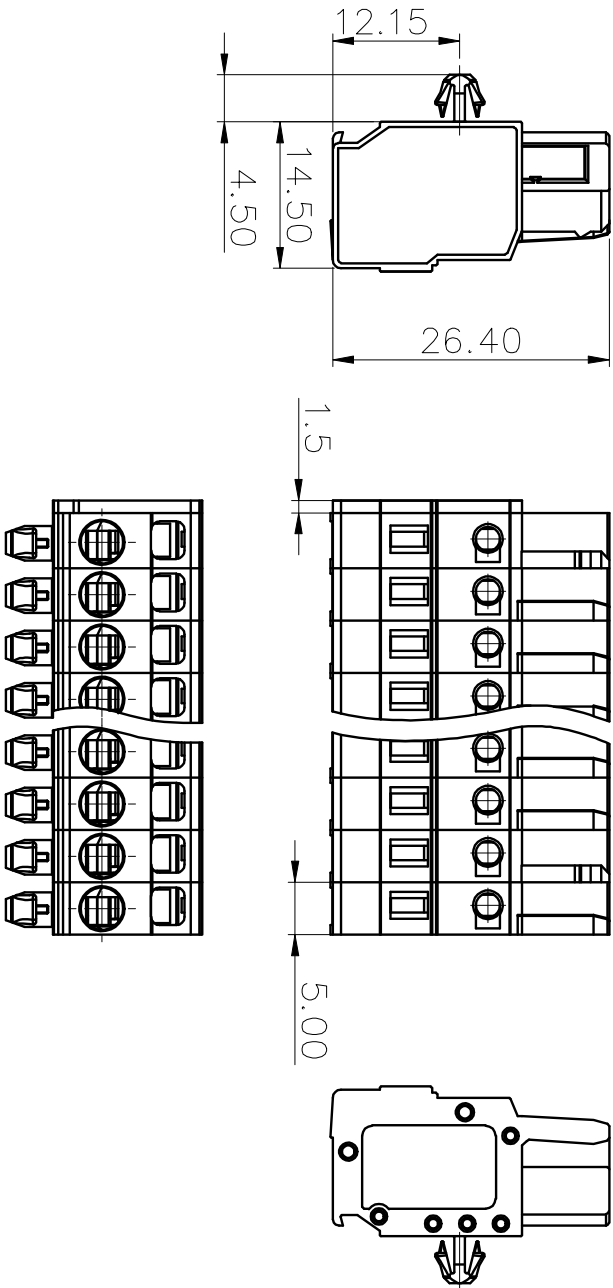

Total Pitch Tolerances											
in mm											
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/			
CHK.	DATE			SCALE	1:1
APP.	DATE				
				NAME	ULO-TB440-8KD-5.0-XXP
				DWGNO	X



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司