


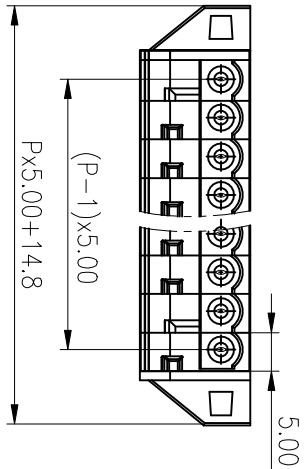

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	—	—
Rated Voltage	300V	—	—

2.Wire range: 24~14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(kV)	4kV
Rate Voltage(V)	250V
Rate Current(A)	16A

2.wire range: 0.2-2.5mm²





NOTES2:

1.Pitch:5.0mm Poles: 02-24P

2.Stripping length: 8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

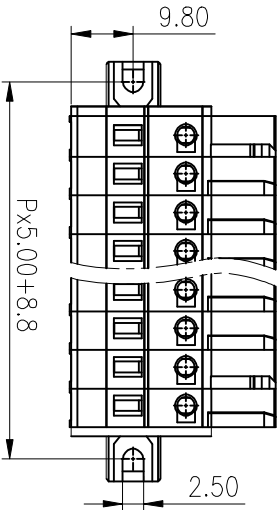

A		Total Pitch Tolerances in mm										Nominal dimension range in mm										—		≡		—		//																			
over	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	over	0	100	over																						
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to																						
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10																													
±0.18		±0.20		±0.25		±0.3		±0.35		±0.44		±0.55		±0.70		±0.75		±0.20		±0.25		±0.30		±0.35		±0.44		±0.55		±0.70		±0.80		±0.90		0.2		0.3		0.3		0.2		0.3		0.5	
6												5												4																							

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	DATE	/	UNITS	MM
CHK.	DATE	SCALE	1 : 1	A4	1/1
APP.	DATE	NAME	UL0-TB440-8KMB-5.0-XXP		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO	X	



宁波歌鹏电子有限公司