

FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	10A	—	—
	Rated Voltage	300V	—	—

2.Wire range: /

IEC Standard

1.	Pollution Degree	3
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4KV
	Rate Voltage(V)	250V
	Rate Current(A)	12A

2.wire range: /


NOTES2:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

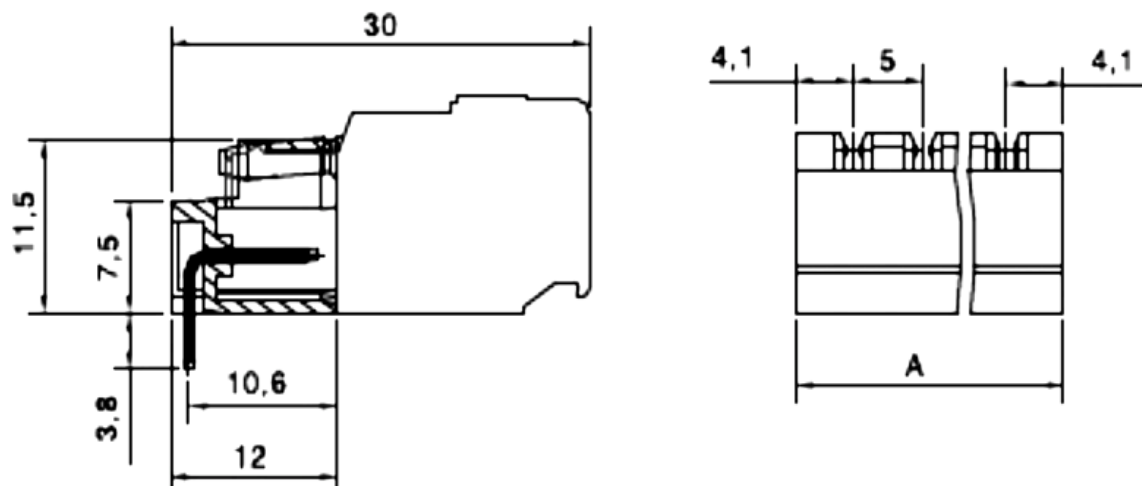

$$A = (P - 1) \times 5.0 + 8.2 \text{ mm}$$

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	0 to 10	all	0 to 100	100 to 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE		NAME	ULO-TB440-8RCB-5.0-XXP	
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.		