
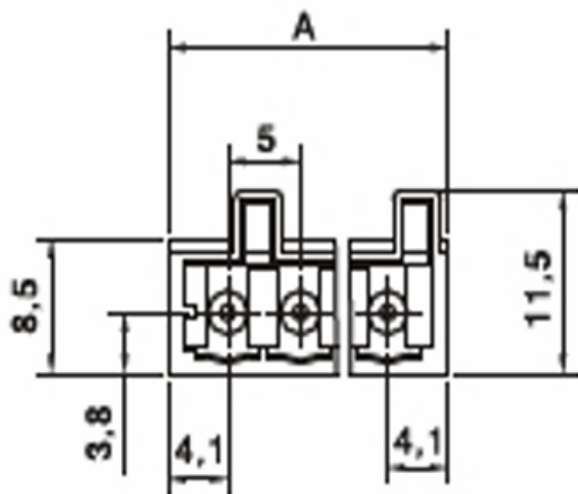


FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

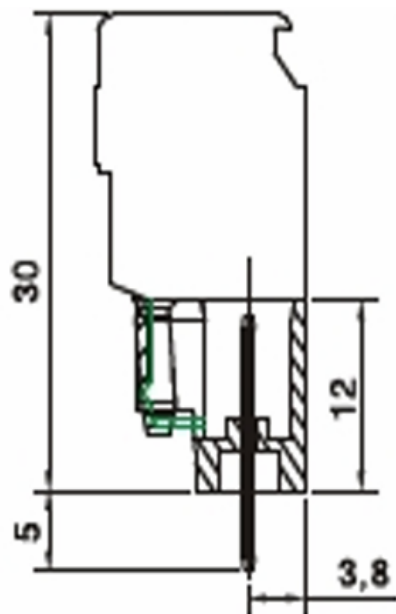

$$A = (P-1) \times 5.0 + 8.2\text{mm}$$

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	10A	-	-
	Rated Voltage	300V	-	-

2.Wire range: /

IEC Standard

1.	Pollution Degree	3
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4KV
	Rate Voltage(V)	250V
	Rate Current(A)	12A

2.wire range: /

NOTES2:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4.RoHS Compliance

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\div$		$—$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150		
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		to	to	to	to	
	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	320	10	100	150						
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	DATE	/	UNITS	MM
CHK.	/	DATE	/	SCALE	1:1
APP.	/	DATE	/	NAME	ULO-TB440-8VCB-5.0-XXP
NINGBO ULO ELECTRONICS CO.,LTD.				DWGNO.	
宁波欧路电子有限公司					