

FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	10A	-	-
Rated Voltage	300V	-	-

2.Wire range: /

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2.wire range: /



NOTES2:

1.Pitch: 5.08mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

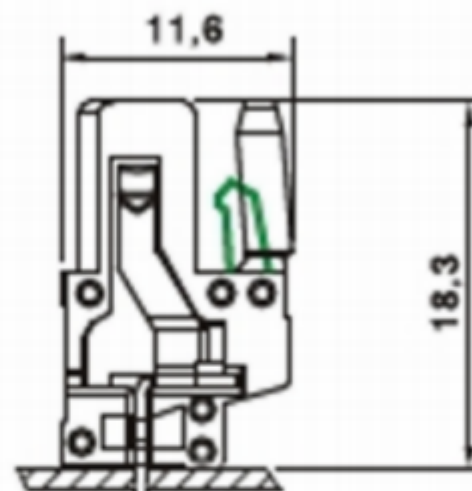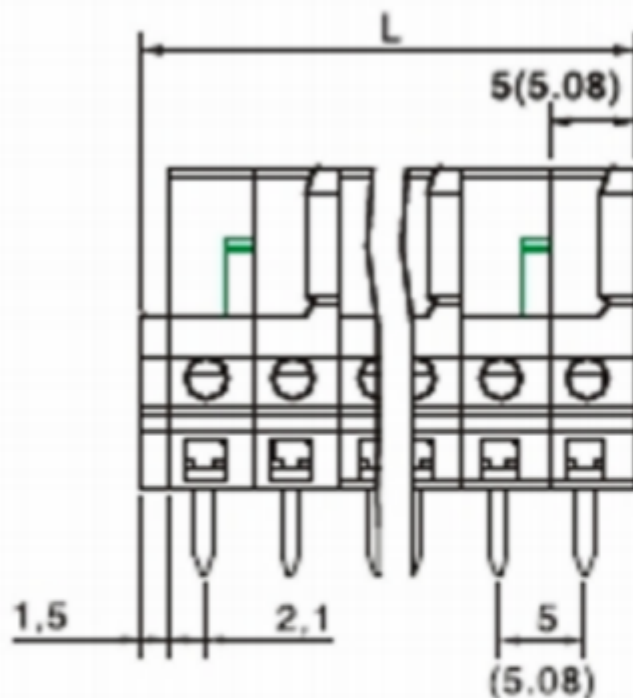

$$L = P \times 5(5.08) + 1.5\text{mm}$$

A	Total Pitch Tolerances									Nominal dimension range									$\perp$		$\div$		$-$		$//$		
	in mm									in mm																	
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over			0	100	over		
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all		to	to	150		
	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10				100	150			
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5			

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB450-8B-5.08-XXP			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME	ULO-TB450-8B-5.08-XXP			
				DWGNO.				