
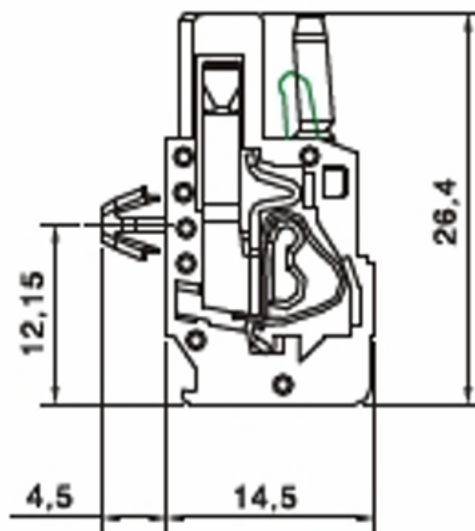


FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

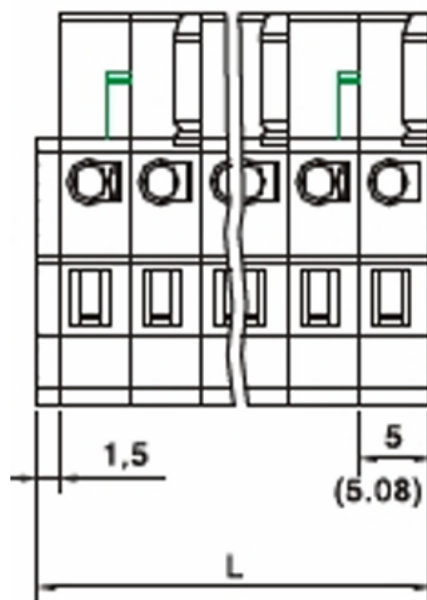

$$L = P \times 5.0(5.08) + 1.5 \text{mm}$$

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	15A	—	—
	Rated Voltage	300V	—	—

2.Wire range: 24~14AWG

IEC Standard

1.	Pollution Degree	3
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4KV
	Rate Voltage(V)	250V
	Rate Current(A)	16A

2.wire range: 0.2-2.5mm²

NOTES2:

1.Pitch: 5.08mm Poles: 02-24P

2.Stripping length:8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB450-8KC-5.08-XXP			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								
				DWGNO.				

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$	$\text{---} \quad //$		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 0	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10			to 100	to 150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3			0.2	0.3	0.5