

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	10A	—	—
Rated Voltage	300V	—	—

2.Wire range: /

IEC Standard






1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

2.wire range:/

NOTES2:

- 1.Pitch:7.5mm Poles: 02-24P
- 2.Stripping length:/
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

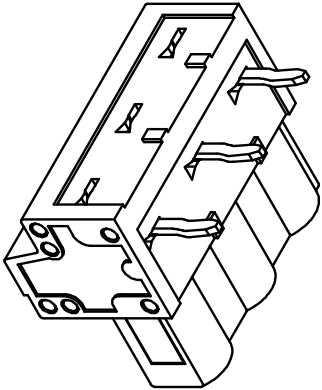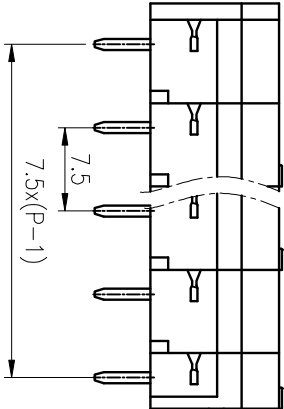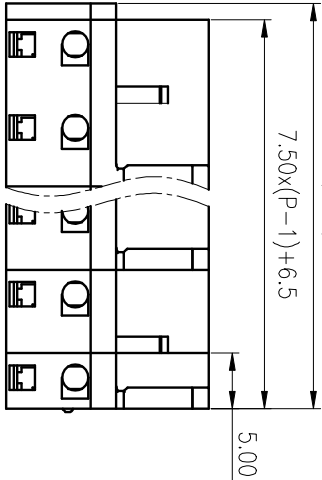

A		Total Pitch Tolerances												Nominal dimension range												—		≡		//	
		in mm												in mm																	
over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to	over	to		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	over	over	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	0	100	100	100	150	150	150	150	150	150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.3	0.5	0.5	0.5	0.5	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	/			
CHK.	DATE			SCALE	1:1
APP.	DATE				
				NAME	UL0-TB460-8A-7.5-XXP
				DWGNO.	X