


FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

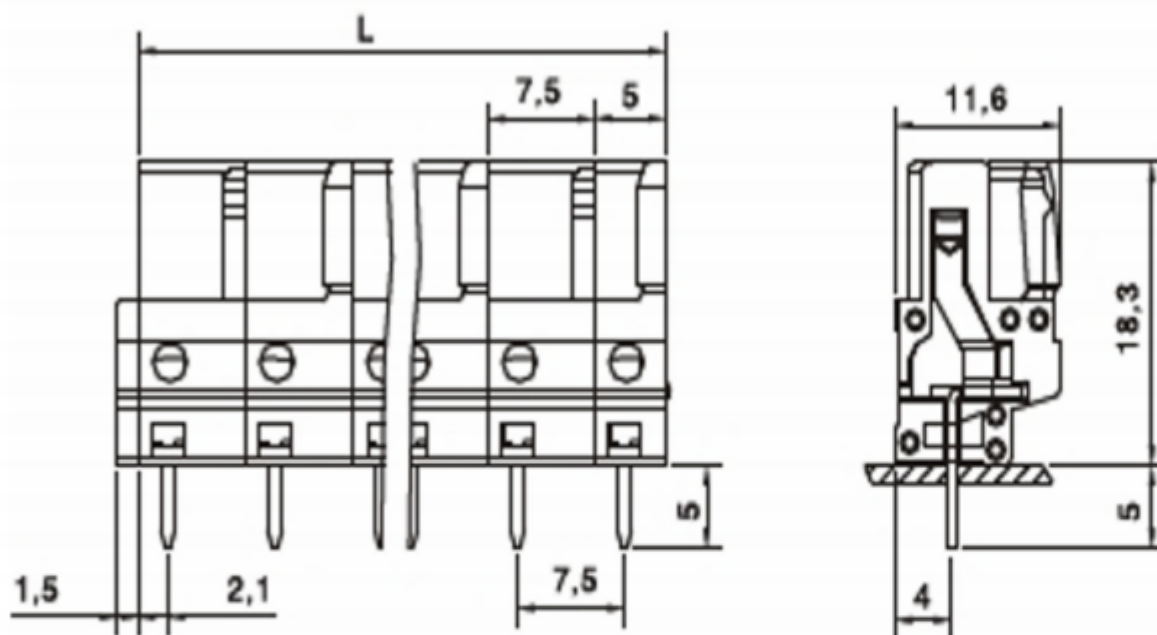

$$L = (P-1) \times 7.5 + 5 + 1.5 \text{mm}$$

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	10A	-	-
Rated Voltage	300V	-	-

2. Wire range: /

IEC Standard

1. Pollution Degree	3
Overvoltage Category	II
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	400V
Rate Current(A)	12A

2. wire range: /

NOTES2:

1. Pitch: 7.5mm Poles: 02-24P

2. Stripping length: /

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	over	over	over
0	30	53	70	90	115	150	200	250	300	30	53	70	90	115	150	200	250	300	10	all	0	100	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	300	30	53	70	90	115	150	200	250	300	10	all	0	100	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-TB460-8D-7.5-XXP			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.					