

FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	15A	-	-
	Rated Voltage	300V	-	-

2.Wire range: 24~14AWG

IEC Standard

1.	Pollution Degree	3
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	6KV
	Rate Voltage(V)	400V
	Rate Current(A)	16A

2.wire range: 0.2-2.5mm²



NOTES2:

1.Pitch: 7.5mm Poles: 02-24P

2.Stripping length:8-9mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

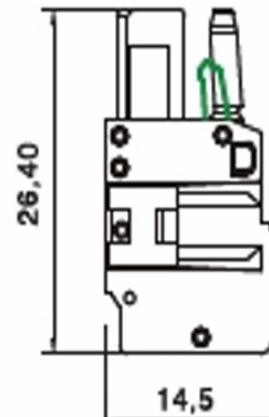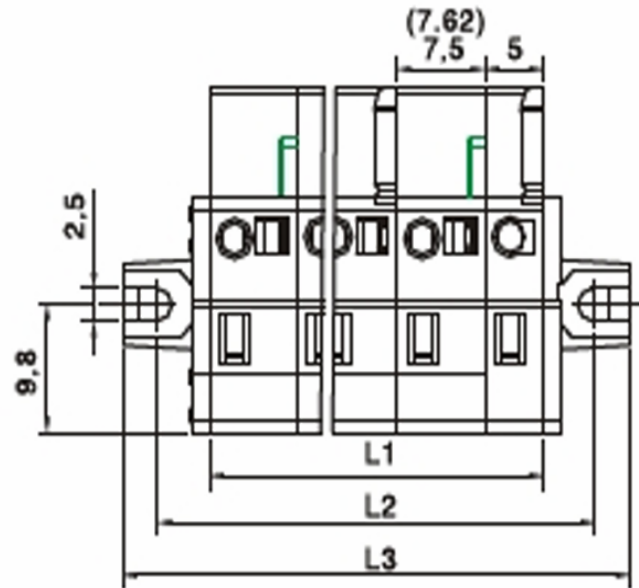

$$\begin{aligned} L1 &= 5.0 + (P-1) \times 7.5(7.62) \text{ mm} \\ L2 &= 5.0 + (P-1) \times 7.5(7.62) + 8.8 \text{ mm} \\ L3 &= 5.0 + (P-1) \times 7.5(7.62) + 14.4 \text{ mm} \end{aligned}$$

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	/	DATE	/	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE			ULO-TB460-8KMA-7.5-XXP		
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME			
				DWGNO.			