


FILE: 21.06.03

REV	E.C.N. NO.	CONTENT	CHK	DATE

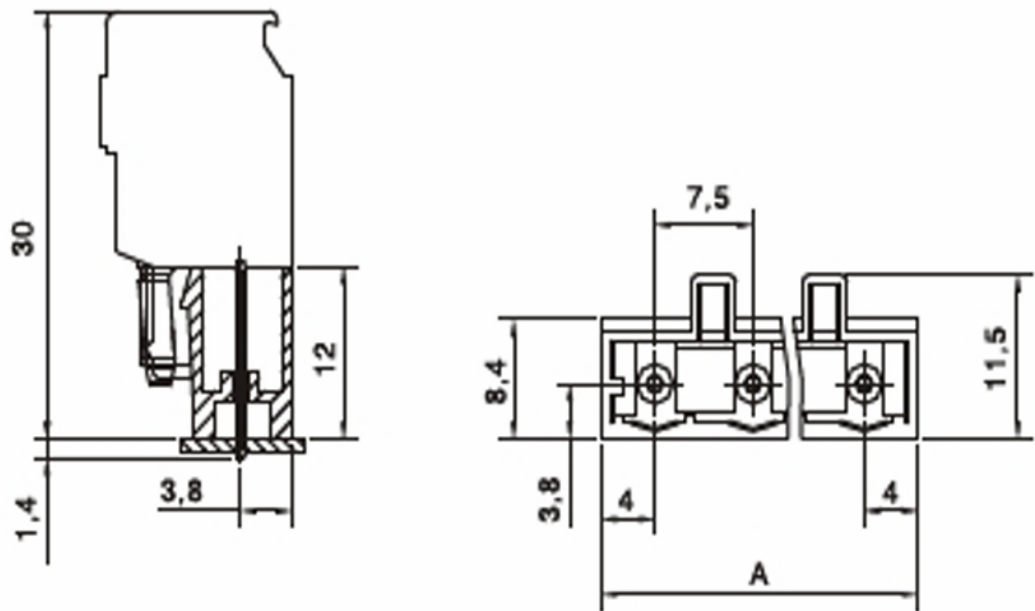

$$A = (P-1) \times 7.5 + 8\text{mm}$$

NOTES1:

UL Standard

1.	Use group	B	C	D
	Rated Current	10A	—	—
	Rated Voltage	300V	—	—

2.Wire range: /

IEC Standard

1.	Pollution Degree	3
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	6KV
	Rate Voltage(V)	400V
	Rate Current(A)	12A

2.wire range: /

NOTES2:

1.Pitch: 7.5mm Poles: 02-24P

2.Stripping length:/

3.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4.RoHS Compliance

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	/	DATE	/	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	ULO-TB460-8VCB-7.5-XXP
	NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	



宁波欧路电子有限公司