


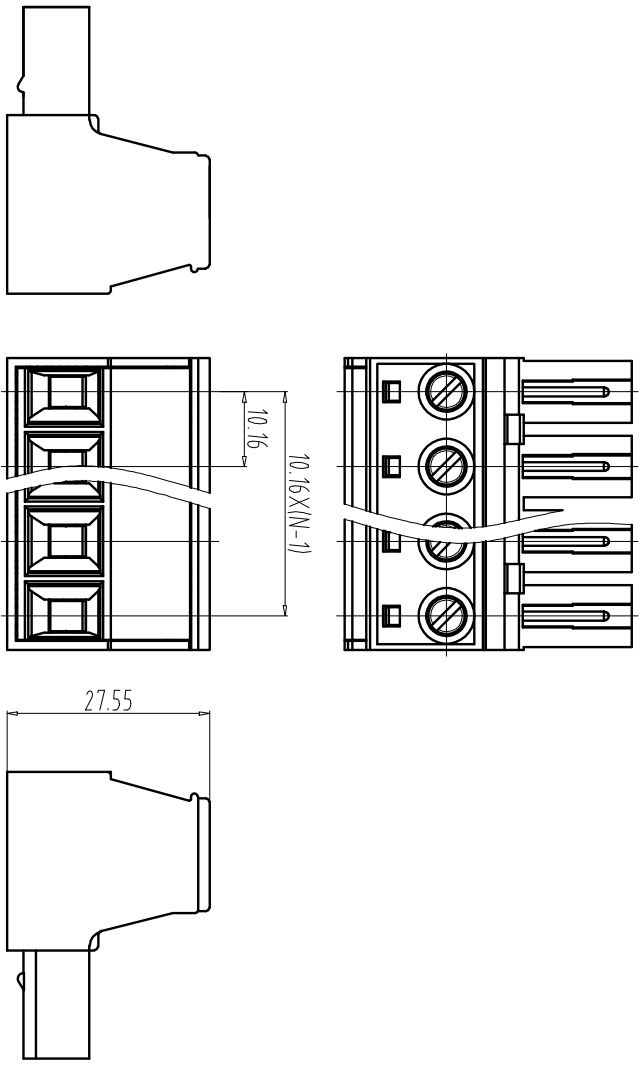

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	52A	52A	10A
Rated Voltage	600V/600V/300V		

2.Wire range: 20~6AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	6KV
Rate Voltage(V)	600V
Rate Current(A)	57A

2.wire range: 0.5-10mm²

3. Torque value: M4, 12Nm

NOTES2:

- 1.Housing1: PA66(UL94V-0)
- 2.Spring: Stainless steel
- 3.Clamp: Copper(lag Plated)
- 4.Cover: PA66(UL94V-0)
- 5.Screw: Copper alloy(M4/Ni Plated)
- 6.Cage: Copper alloy(M4/Ni Plated)

NOTES3:

- 1.Pitch: 10.16mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

UL0-TB83 - 2K/10.16 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code Customer requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

Total Pitch Tolerances											
in mm											
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.28	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 1/1
APP	DATE	NAME	UL0-TB83-2K/10.16-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO	UL0TB83Y000A