

FILE: 2105.18

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~28AWG

IEC Standard

1.

Insulation Degree	2
Overvoltage category	4
Rated voltage (kV)	4.2/50V
Rated Voltage(V)	250V
Rated Current(A)	18A

2. Wire range: 10-2.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Conductor1: Brass(Sn Plated)

3.Conductor2: Brass(Sn Plated)

4. Conductor3: Brass(Sn Plated)

5.Cage: Brass(Ni) Plated)

6.Screw: Steel(M2.5,Zn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 3x(02-24)P

2.Stripping length: 6-7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

ULO-TB91 - 500A3/5.0 - 3xXXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements



color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

Total Pitch Tolerances

Nominal dimension range

— //

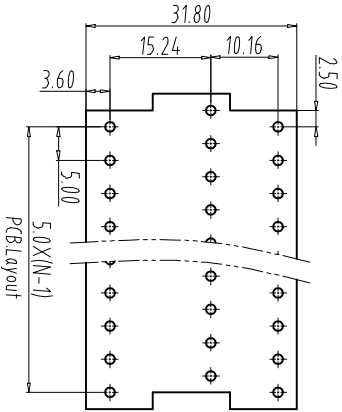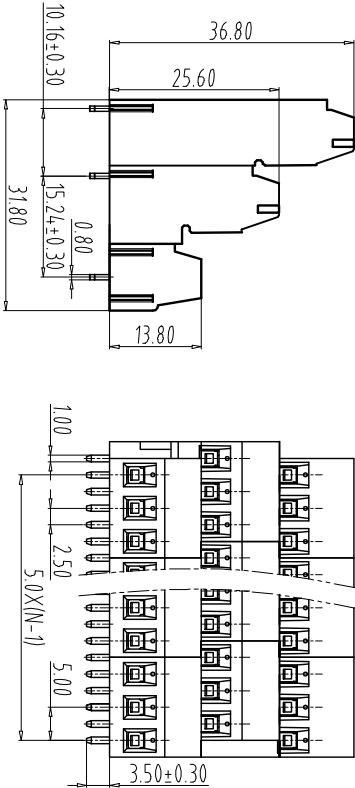

in mm

in mm

— //

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over

0

to

30

to

53

to

70

to

90

to

115

to

150

over

over