


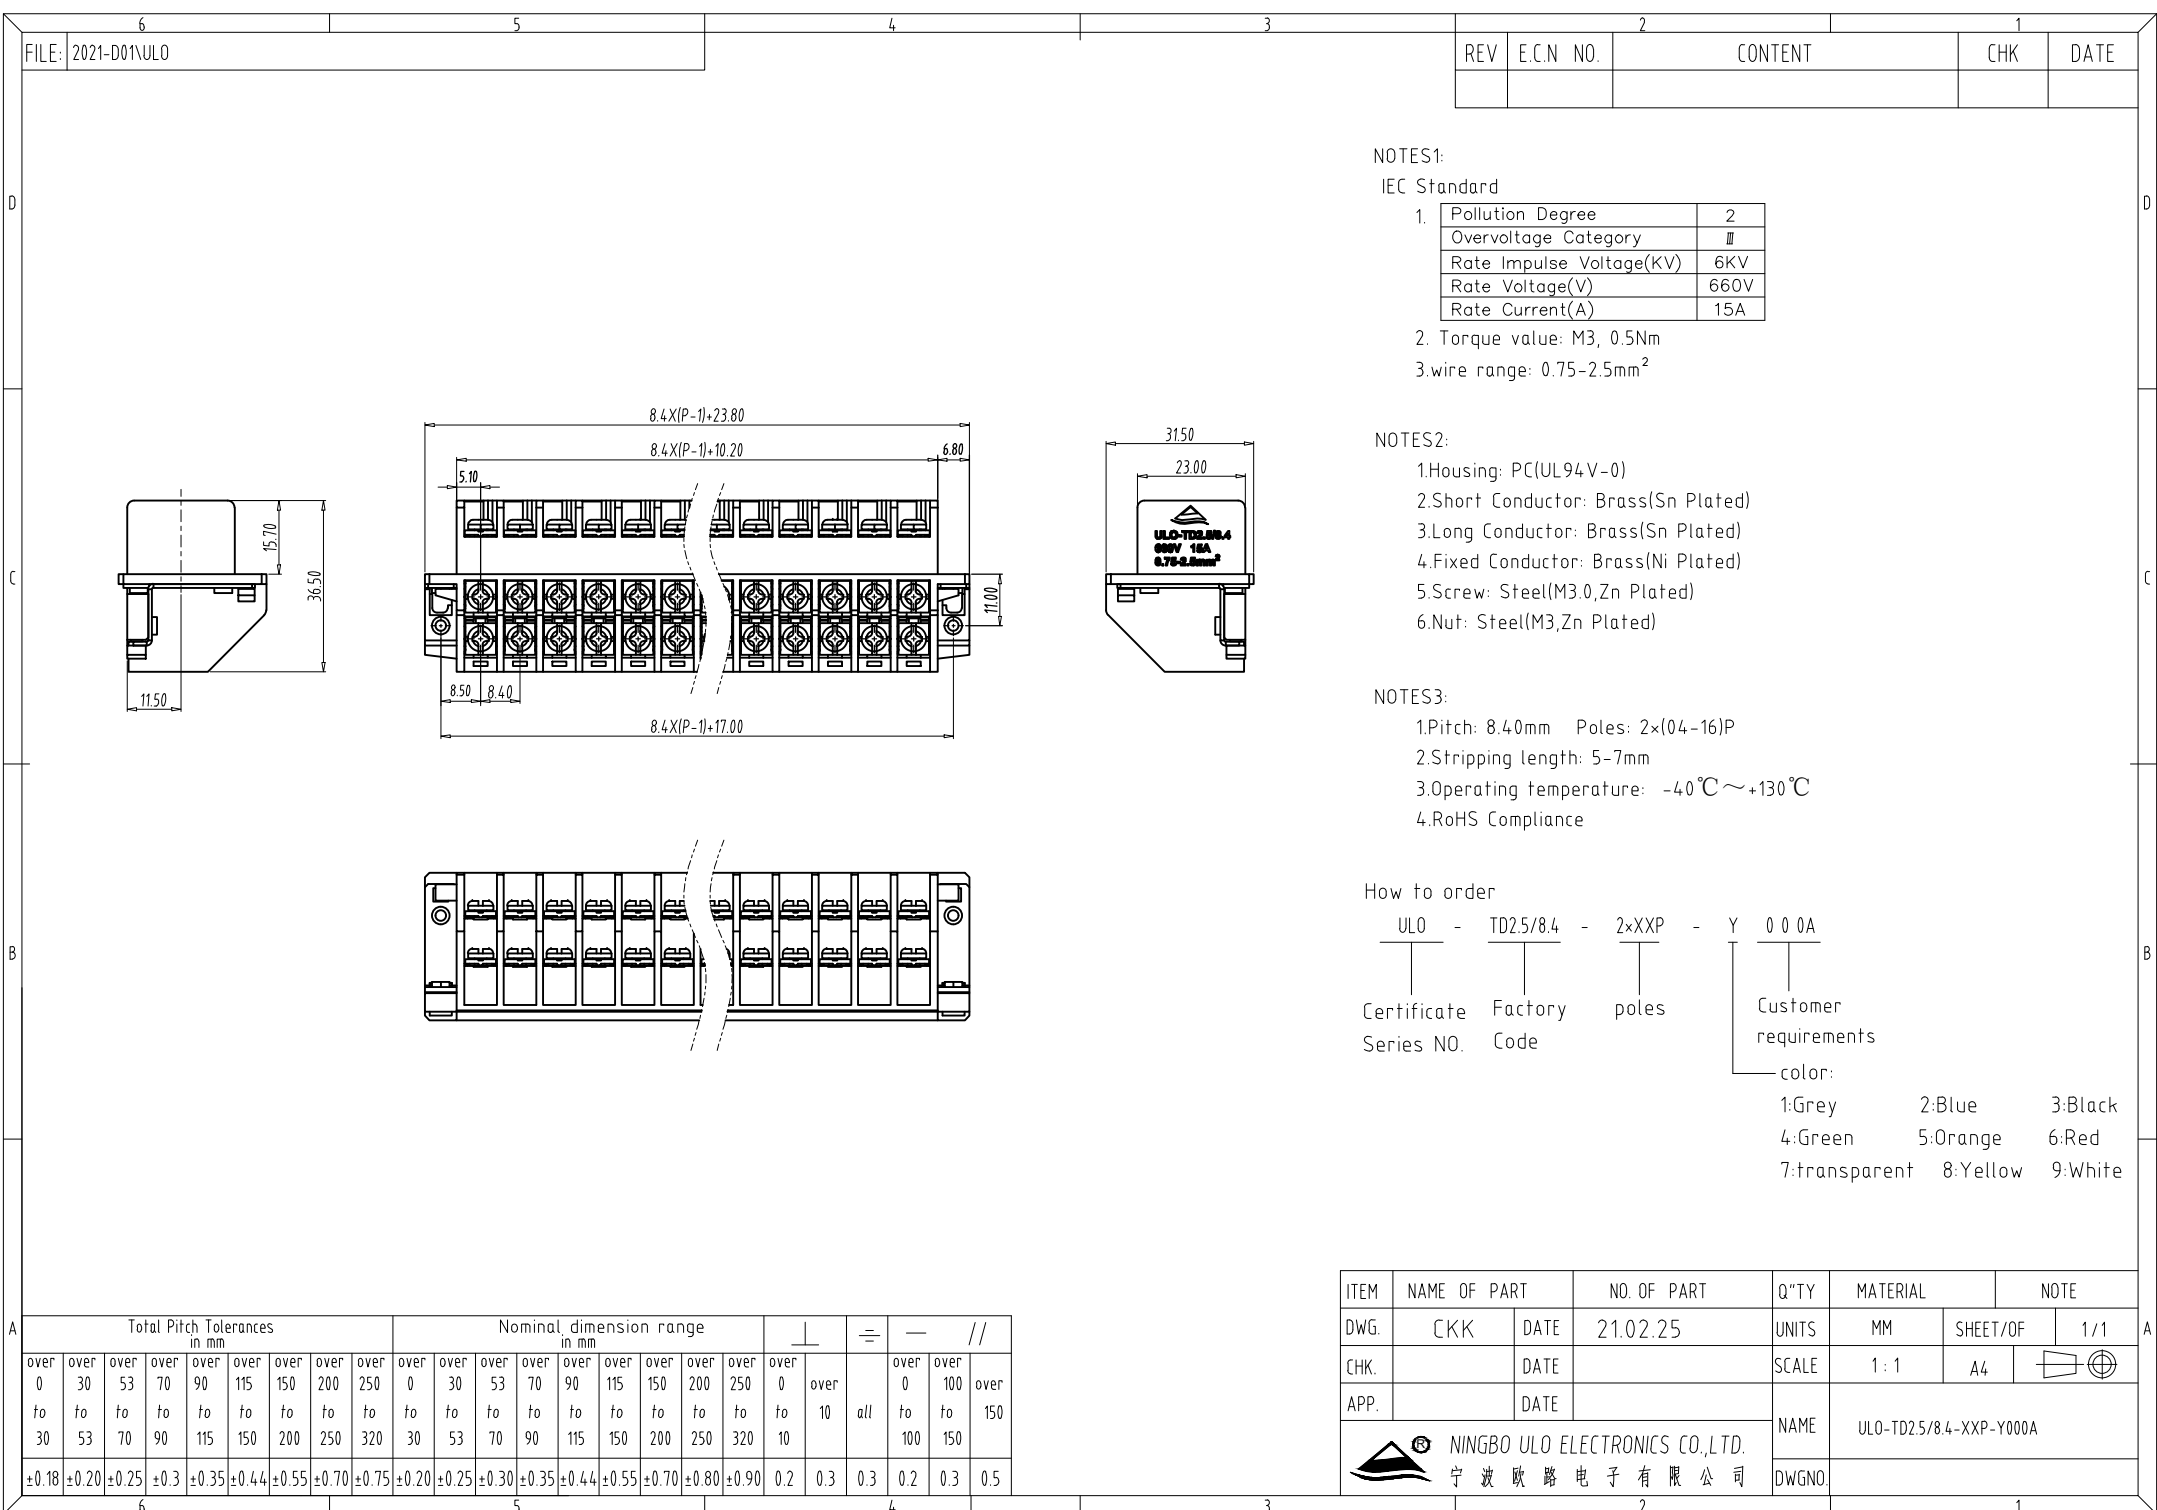

6

5

4

3

2

1

FILE: 2021-D01VULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

IEC Standard

1.	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	6KV
	Rate Voltage(V)	660V
	Rate Current(A)	15A

2. Torque value: M3, 0.5Nm

3.wire range: 0.75-2.5mm²

NOTES2:

- Housing: PC(UL94V-0)
- Short Conductor: Brass(Sn Plated)
- Long Conductor: Brass(Sn Plated)
- Fixed Conductor: Brass(Ni Plated)
- Screw: Steel(M3.0,Zn Plated)
- Nut: Steel(M3,Zn Plated)

NOTES3:

- Pitch: 8.40mm Poles: 2x(04-16)P
- Stripping length: 5-7mm
- Operating temperature: -40℃~+130℃
- RoHS Compliance

How to order

ULO - TD2.5/8.4 - 2×XXP - Y 0 0 0A

Certificate Series NO. Factory Code poles Customer requirements color:

1:Grey

2:Blue

3:Black

4:Green

5:Orange

6:Red

7:transparent

8:Yellow

9:White

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10		to 100	to 150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	

ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL		NOTE			
DWG.	CKK	DATE	21.02.25		UNITS	MM	SHEET/OF	1/1			
CHK.		DATE			SCALE	1:1	A4				
APP.		DATE			NAME	ULO-TD2.5/8.4-XXP-Y000A					
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司						DWGNO.					