


FILE: 2021-D01VUL0					
REV	E.C.N NO.	CONTENT	CHK	DATE	

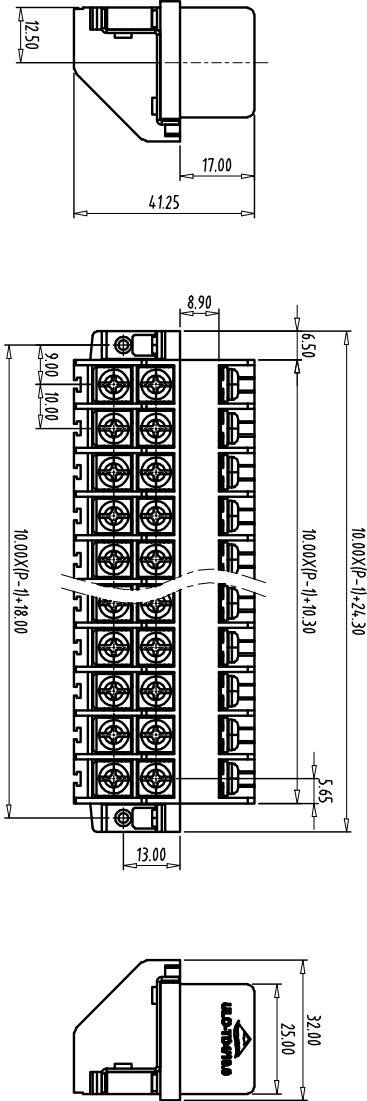

NOTES:

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	5KV
Rate Voltage(V)	400/690V
Rate Current(A)	25A

2. Torque value: M₄, 1.2Nm
3. wire range: 2.5-4.0mm²

NOTES2:

- 1.Housing: PC(UL94V-0)
2.Short Conductor: Brass(Sn Plated)
3.Long Conductor: Brass(Sn Plated)
4.Fixed Conductor: Brass(Ni Plated)
5.Screw: Steel(M₄,0.2 Zn Plated)
6.Nut: Steel(M₄,0.2 Zn Plated)

NOTES3:

- 1.Pitch: 10.00mm Poles: 2x(0.4-16)P
2.Stripping length: 5-7mm
3.Operating temperature: -40℃~+130℃
4.RoHS Compliance

How to order

UL0 - TD4/10.0 - 2xXP - Y 0.0.0A

Certificate Factory poles
Series NO. Code
Customer requirements

- color:
1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
6			5			4			0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CKK	DATE	21.02.25	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TD4/10.0-XP-Y000A		

