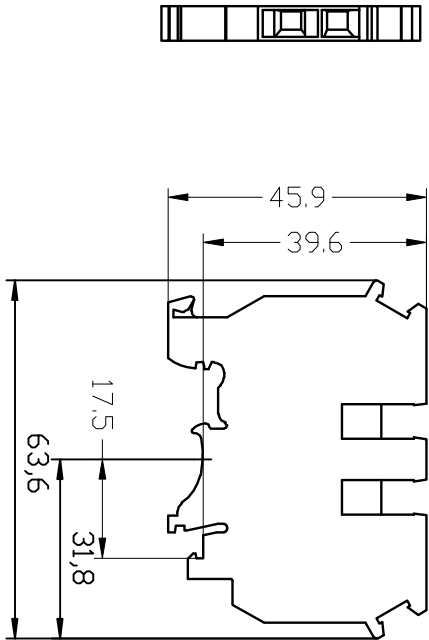


Technical data:

Product properties



- Product type: Multi-conductor terminal block
- Number of positions: 1
- Number of connections: 4
- Number of rows: 1
- Potentials: 1

Electrical properties

- Nominal voltage: 630V
- Rated surge voltage: 8KV
- Nominal current: 32A
- Maximum load current: 32A
- Nominal cross section: 4mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: /

Connection data

- Conductor cross section rigid: 0.2mm²-6mm²
- Cross section AWG: 24-10
- Conductor cross section flexible: 0.2mm²-4mm²
- Conductor cross section, flexible AWG: 24-12
- Stripping length: 8mm

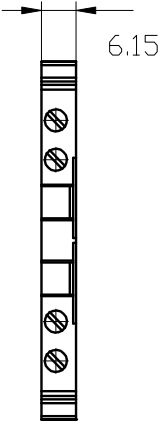

2	UL0-TB344-UDK 4 BU	Blue
---	--------------------	------

1	UL0-TB344-UDK 4	Gray
---	-----------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

Total Pitch Tolerances		Nominal dimension range										—	//
		in mm											

over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4
6									5			4	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.		DATE		SCALE	1 : 1
APP.		DATE		NAME	UL0-TB344-UDK4-XX



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.