
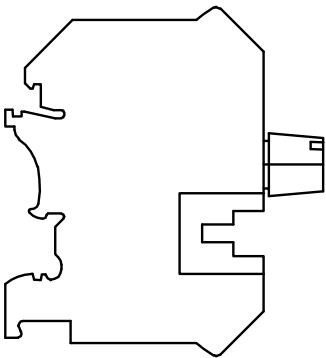

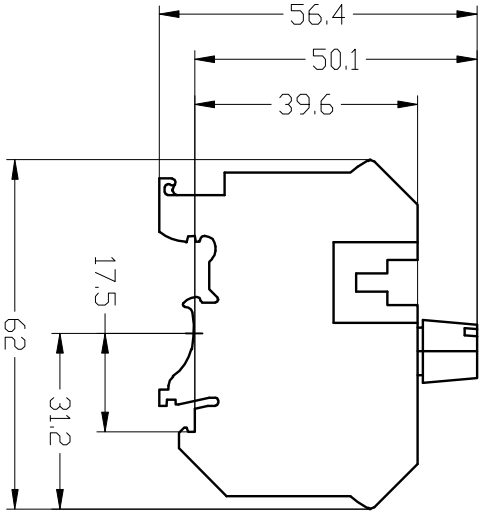




Technical data:

Product properties



- 1.Product type:Fuse terminal block
- 2.Number of positions: 1
- 3.Number of connections: 2
- 4.Number of rows: 1
- 5.Potentials: 1

Electrical properties

- 1.Nominal voltage: 500V/800V
- 2.Rated surge voltage: 4KV
- 3.Nominal current: 10A
- 4.Maximum load current: 10A
- 5.Nominal cross section: 1.5mm²
- 6.Overvoltage category: III
- 7.Degree of pollution: 3
- 8.Operating temperature range: /

Connection data

- 1.Conductor cross section rigid: 0.5mm²-16mm²
- 2.Cross section AWG: 20-6
- 3.Conductor cross section flexible: 0.5mm²-16mm²
- 4.Conductor cross section, flexible AWG: 20-6
- 5.Stripping length: 11mm



Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	30	0	30	53	70	90	115	150	200	250	30	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	100
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	over
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.5
6										5										4	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	SHEET/OF 1/1
CHK.	DATE	SCALE	1 : 1	A4	
APP.	DATE	NAME	UK10-DREHS(SX20)		
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.	1	