


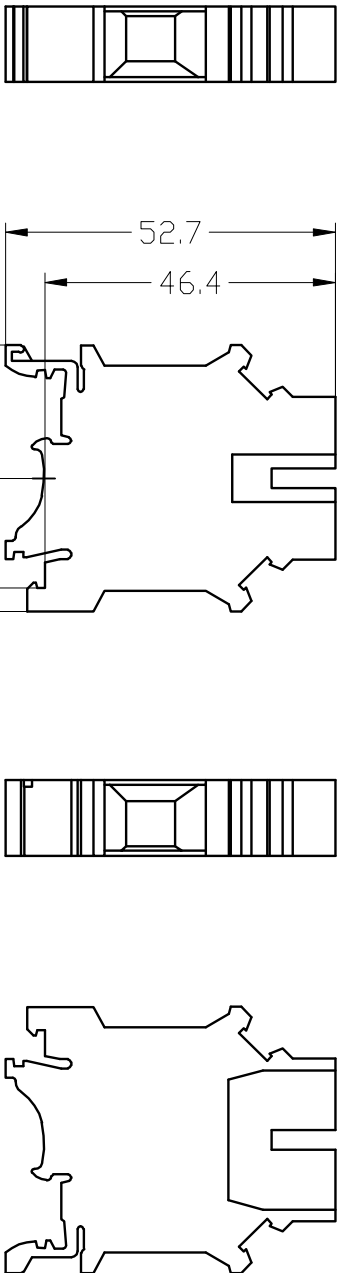

Technical data:

Product properties



- Product type: Feed-through terminal block
- Number of connections: 2
- Number of rows: 1
- Potentials: 1

Electrical properties

- Nominal voltage: 800V
- Rated surge voltage: 8KV
- Nominal current: 76A
- Maximum load current: 101A
- Nominal cross section: 16mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 2.5mm²-25mm²
- Cross section AWG: 12-4
- Conductor cross section flexible: 4mm²-16mm²
- Conductor cross section, flexible AWG: 10-6
- Stripping length: 11mm

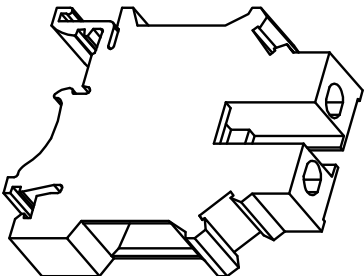

2	ULO-TB336-UK 16 N BU	Blue
1	ULO-TB336-UK 16 N	Gray

ITEM	NAME OF PART	Color
------	--------------	-------

Told Pitch Tolerances	
in mm	

Nominal dimension range	
in mm	

T	
≡	
—	
//	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-TB336-UK16N-XX		



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

DWGNO.

1