
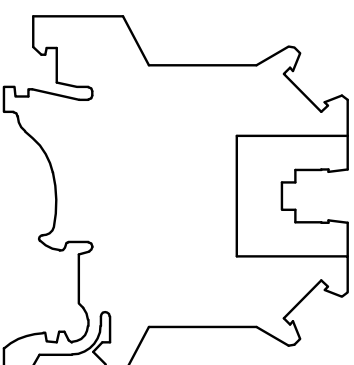


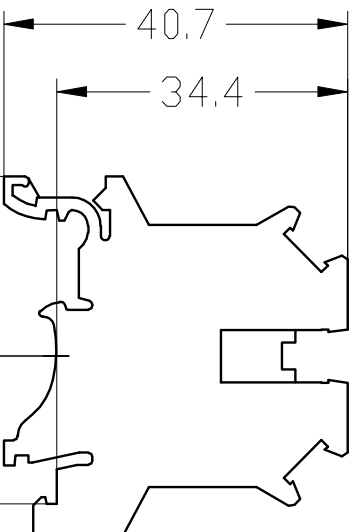

Technical data:

Product properties



1. Product type: Feed-through terminal block
2. Number of connections: 2
3. Number of rows: 1
4. Potentials: 1

Electrical properties

1. Nominal voltage: 690V
2. Rated surge voltage: 8kV
3. Nominal current: 24A
4. Maximum load current: /
5. Nominal cross section: 2.5mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0.2mm^2 – 4mm^2
2. Cross section AWG: 24–12
3. Conductor cross section flexible: 0.2mm^2 – 2.5mm^2
4. Conductor cross section, flexible AWG: 24–14
5. Stripping length: 7mm

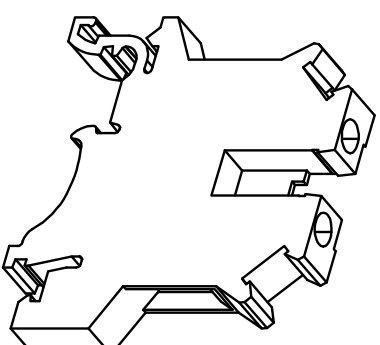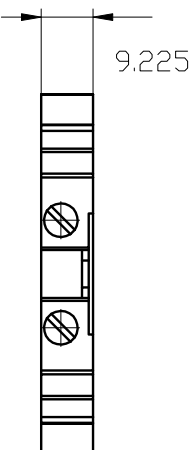

2	UL0-TB331-UK 2.5B BU	Blue
1	UL0-TB331-UK 2.5B	Gray

A			
Total Pitch Tolerances in mm	Nominal dimension range in mm	T	— //

[illegible]

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	S.W.L	DATE	24.1.12	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		ULO-TB331-UK2.5B-XX 			
			NAME				
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.			