
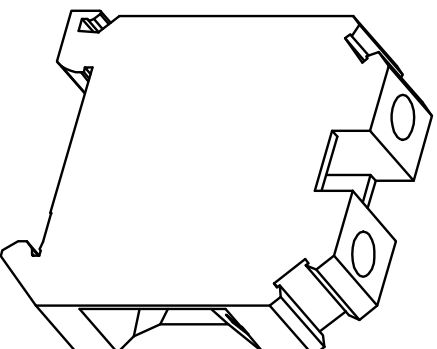
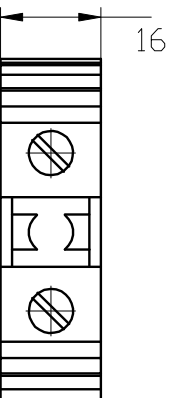
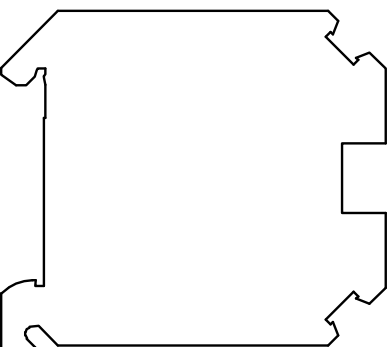

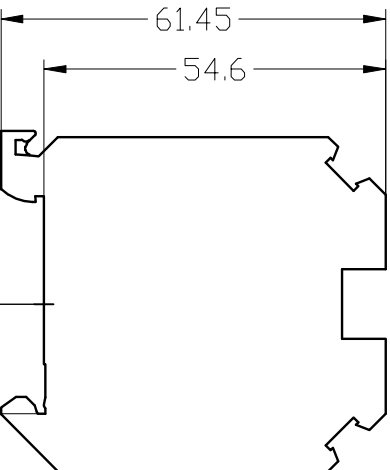




Technical data:

Product properties

- 1.Product type:Feed-through terminal block
- 2.Number of connections: 2
- 3.Number of rows: 1
- 4.Potentials: 1

Electrical properties

1. Nominal voltage: 1000V
2. Rated surge voltage: 8kV
3. Nominal current: 125A
4. Maximum load current: 125A
5. Nominal cross section: 35mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: /

Connection data

1. Conductor cross section rigid: 10mm^2 – 35mm^2
2. Cross section AWG: 6–2
3. Conductor cross section flexible: 10mm^2 – 35mm^2
4. Conductor cross section, flexible AWG: 6–2
5. Stripping length: 16mm

2	UL0-TB337-UK 35 N BU	Blue
1	UL0-TB337-UK 35 N	Gray

A			
Total Pitch Tolerances in mm	Nominal dimension range in mm	T	$\pm$ — //

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	S WL	DATE	24.1.12	UNITS	MM
CHK.	DATE	SCALE	1 : 1	A4	
APP.	DATE				