
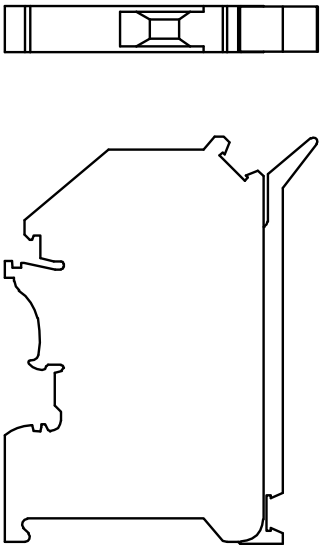


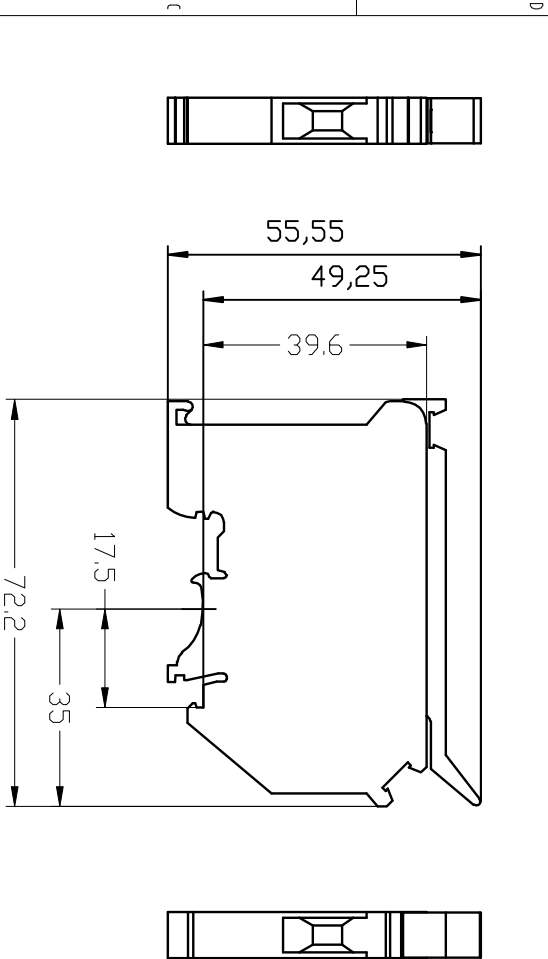

Technical data:

Product properties


- 1. Product type: Fuse terminal block
- 2. Number of positions: 1
- 3. Number of connections: 2
- 4. Number of rows: 1
- 5. Potentials: 1

Electrical properties

- 1. Nominal voltage: 800V
- 2. Rated surge voltage: 8kV
- 3. Nominal current: 6.3A
- 4. Maximum load current: 6.3A
- 5. Nominal cross section: 1mm²
- 6. Overvoltage category: III
- 7. Degree of pollution: 3
- 8. Operating temperature range: /

Connection data

- 1. Conductor cross section rigid: /
- 2. Cross section AWG: /
- 3. Conductor cross section flexible: /
- 4. Conductor cross section, flexible AWG: /
- 5. Stripping length: 8mm

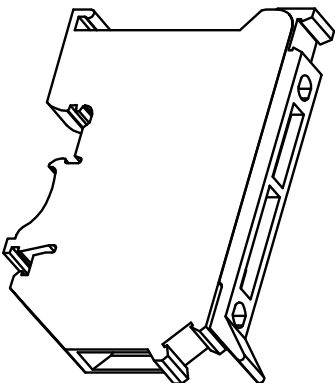

| Total Pitch Tolerances |       |       |      |       |       |       |       |       |       | Nominal dimension range |       |       |       |       |       |       |       |      |      | —   | //  |
|------------------------|-------|-------|------|-------|-------|-------|-------|-------|-------|-------------------------|-------|-------|-------|-------|-------|-------|-------|------|------|-----|-----|
| in mm                  |       |       |      |       |       |       |       |       |       | in mm                   |       |       |       |       |       |       |       |      |      |     |     |
| over                   | over  | over  | over | over  | over  | over  | over  | over  | over  | over                    | over  | over  | over  | over  | over  | over  | over  | over | over |     |     |
| 0                      | 30    | 53    | 70   | 90    | 115   | 150   | 200   | 250   | 30    | 30                      | 53    | 70    | 90    | 115   | 150   | 200   | 250   | 30   | 30   | 0   | 100 |
| to                     | to    | to    | to   | to    | to    | to    | to    | to    | to    | to                      | to    | to    | to    | to    | to    | to    | to    | to   | to   | to  | to  |
| 30                     | 53    | 70    | 90   | 115   | 150   | 200   | 250   | 320   | 30    | 53                      | 70    | 90    | 115   | 150   | 200   | 250   | 320   | 10   | 100  | 150 | 150 |
| ±0.18                  | ±0.20 | ±0.25 | ±0.3 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.75 | ±0.20 | ±0.25                   | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | 0.2  | 0.3  | 0.2 | 0.3 |
| 6                      |       |       |      |       |       |       |       |       |       | 5                       |       |       |       |       |       |       |       |      |      | 4   |     |

| ITEM                            | NAME OF PART | NO. OF PART | Q'TY                      | MATERIAL | NOTE |
|---------------------------------|--------------|-------------|---------------------------|----------|------|
| DWG.                            | SWL          | DATE        | 24.1.12                   | UNITS    | MM   |
| CHK.                            | DATE         | SCALE       | 1 : 1                     | A4       | 1/1  |
| APP.                            | DATE         | NAME        | UL0-TB350-UK5-HESIL A/250 |          |      |
| NINGBO UL0 ELECTRONICS CO.,LTD. |              |             | DWGNO.                    |          |      |



宁波欧路电子有限公司