
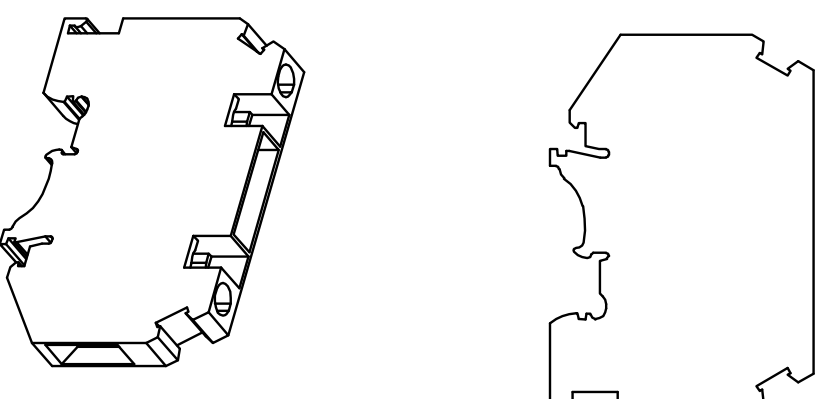


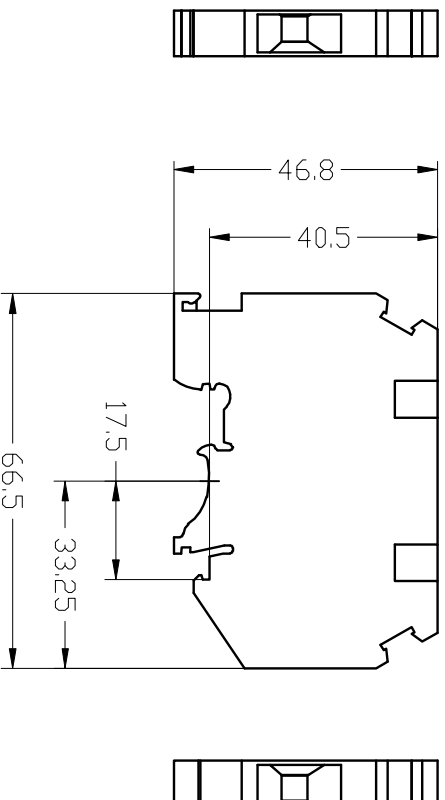

Technical data:

Product properties

1. Product type: Test disconnect terminal block

2. Number of connections: 2

3. Number of rows: 1

4. Potentials: 1

Electrical properties

1. Nominal voltage: 500V

2. Rated surge voltage: 6kV

3. Nominal current: 41A

4. Maximum load current: 57A

5. Nominal cross section: 6mm^2

6. Overvoltage category:

7. Degree of pollution: 3

8. Operating temperature range: /

Connection data

1. Conductor cross section rigid: 0.5mm^2 – 10mm^2

2. Cross section AWG: 20-8

3. Conductor cross section flexible: $0.5\text{mm}^2\text{--}6\text{mm}^2$

4. Conductor cross section, flexible AWG: 20-10

5. Stripping length: 10mm

A		Total Pitch Tolerances						Nominal dimension range											
		in mm						in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	
6		5						4											

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	S.W.L	DATE	UNITS	MM	1/1
CHK.		DATE	SCALE	1 : 1	
APP.		DATE		ALL	
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			NAME	ULO-TB351-UK6-T	
			DWGNO.		