
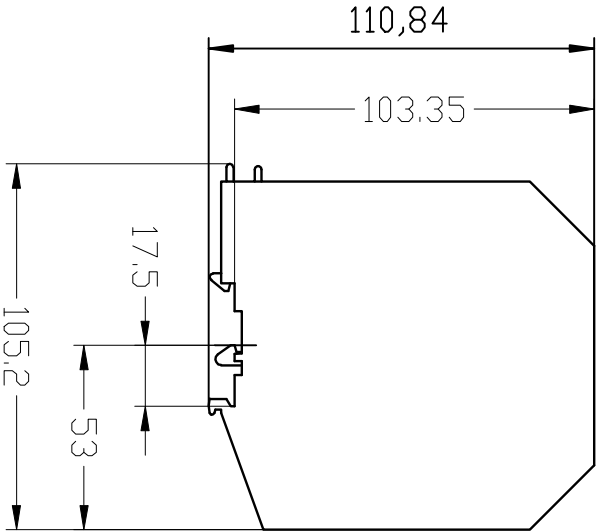




Technical data:

Product properties

1. Product type:High current terminal block

2. Number of connections: 2

3. Number of rows: 1

4. Potentials: 1

Electrical properties

1.Nominal voltage: 1000V

2. Rated surge voltage: 8KV

3. Nominal current: 309A

4. Maximum load current: 309A

5. Nominal cross section: 150mm²

6. Overvoltage category: III

7. Degree of pollution: 3

8. Operating temperature range: -60℃~+110℃

Connection data



1. Conductor cross section rigid: 35mm²~150mm²

2. Cross section AWG: 1/0-250 kcmil

3. Conductor cross section flexible: 50mm²~150mm²

4. Conductor cross section, flexible AWG: 1/0-250 kcmil

5. Striping length: 40mm

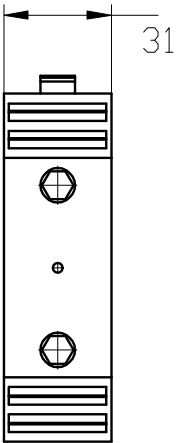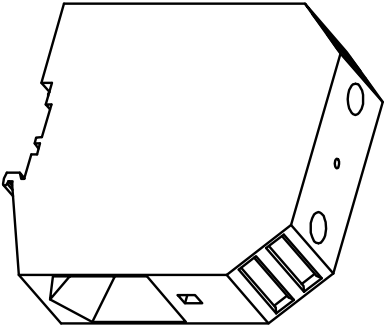

2	ULO-TB342-UKH 150 BU	Blue
---	----------------------	------

1	ULO-TB342-UKH 150	Gray
---	-------------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

Total Pitch Tolerances		Nominal dimension range															+	≡	—	//
		in mm																		
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.5
		654																		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	S.W.L	DATE	24.1.12	UNITS	MM
CHK.	DATE		SCALE	1 : 1	A4
APP.	DATE		NAME	ULO-TB342-UKH150-XX	
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		



宁波欧路电子有限公司