

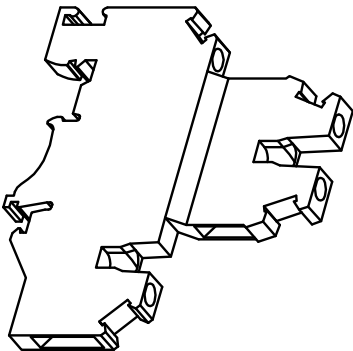
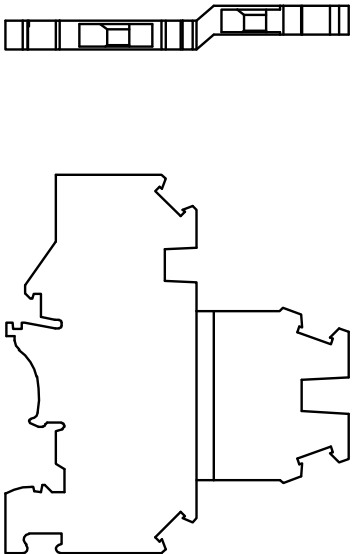


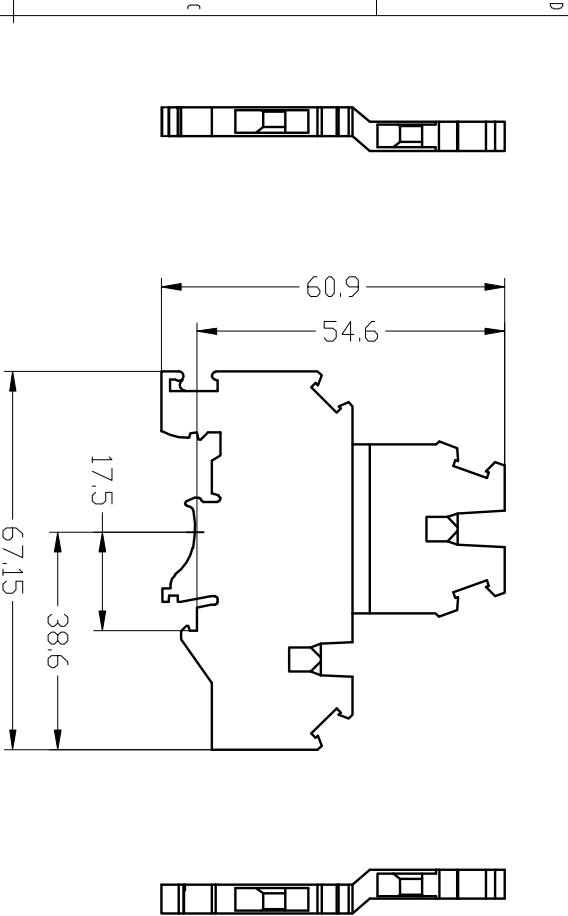

- Technical data:**
- Product properties**
- Product type: Multi-level terminal block
 - Number of connections: 4
 - Number of rows: 2
 - Potentials: 2
- Electrical properties**
- Nominal voltage: 500V
 - Rated surge voltage: 6KV
 - Nominal current: 24A
 - Maximum load current: 32A
 - Nominal cross section: 2.5mm²
 - Overvoltage category: III
 - Degree of pollution: 3
 - Operating temperature range: /
- Connection data**
- Conductor cross section rigid: 0.2mm²-4mm²
 - Cross section AWG: 24-12
 - Conductor cross section flexible: 0.2mm²-2.5mm²
 - Conductor cross section, flexible AWG: 24-14
 - Stripping length: 8mm

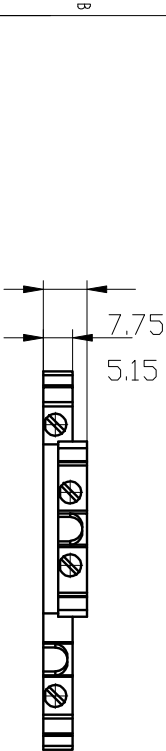

2	UL0-TB345-UKK8 3 BU	Blue
1	UL0-TB345-UKK8 3	Gray

ITEM	NAME OF PART	Color
------	--------------	-------

Told Pitch Tolerances											
in mm											
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.3	±0.4	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
6						5					

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB345-UKK8-XX		
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		