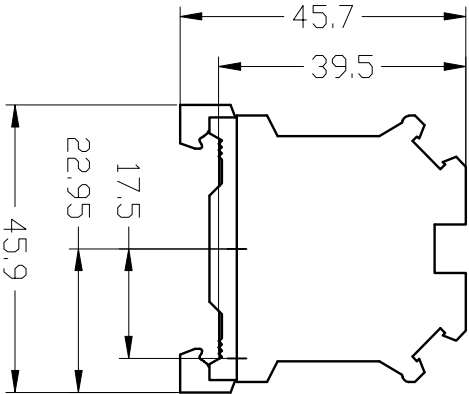



Technical data:

Product properties



- 1.Product type:Ground terminal block
- 2.Number of connections: 1
- 3.Number of rows: 2
- 4.Potentials: 1

Electrical properties

- 1.Nominal voltage: /
- 2.Rated surge voltage: 8KV
- 3.Nominal current: /
- 4.Maximum load current: /
- 5.Nominal cross section: 10mm²
- 6.Overvoltage category: III
- 7.Degree of pollution: 3
- 8.Operating temperature range: -60℃~+110℃

Connection data

- 1. Conductor cross section rigid: 0.5mm²-16mm²
- 2. Cross section AWG: 20-6
- 3. Conductor cross section flexible: 0.5mm²-10mm²
- 4. Conductor cross section, flexible AWG: 20-8
- 5. Stripping length: 10mm



Total Pitch Tolerances												Nominal dimension range												T		≡		—		//		
in mm												in mm																				
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250	30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	to	to	to	to	to	to	to	to	to	to	to	to	to
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5									
6												5												4								

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE							
DWG.	SWL		DATE		24.1.12		UNITS		MM		SHEET/OF		1/1		
CHK.			DATE				SCALE		1 : 1		A4				
APP.			DATE						NAME		ULO-TB365-USLKG10N				
								DWGNO.							
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司															
21															