


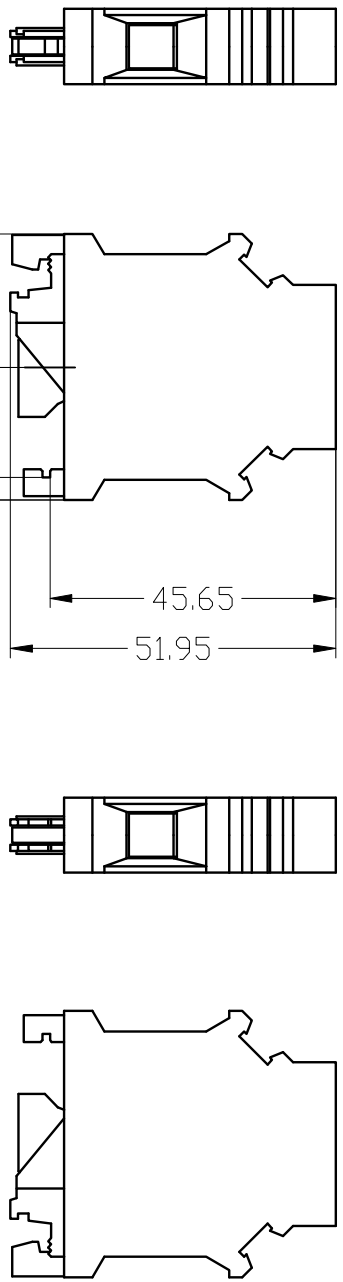

Technical data:

Product properties

1.Product type:Ground terminal block

2.Number of connections: 1

3.Number of rows: 2

4.Potentials: 1

Electrical properties

1.Nominal voltage: /

2.Rated surge voltage: 8KV

3.Nominal current: /

4.Maximum load current: /

5.Nominal cross section: 16mm²

6.Overvoltage category: III

7.Degree of pollution: 3

8.Operating temperature range: -60℃~+110℃

Connection data



1. Conductor cross section rigid: 2. 5mm²-25mm²

2. Cross section AWG: 12-4

3. Conductor cross section flexible: 4mm²-16mm²

4. Conductor cross section, flexible AWG: 10-6

5. Stripping length: 11mm

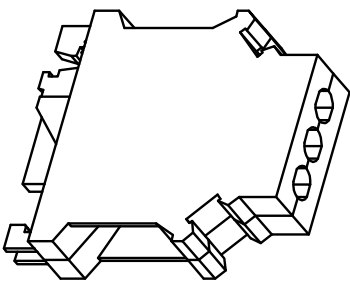

Total Pitch Tolerances											
in mm											
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
0.2	0.3	0.3	0.2	0.3	0.3	0.5					

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4	
APP.	DATE	NAME	UL0-TB363-USLKG16N		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司