

● Technical data

Rated supply voltage	AC 220V
Operation voltage range	AC 80V~400V(single phase)
Rated frequency	50/60Hz
Electric current(>A)setting range	1~40/63A
Overvoltage(>U)setting range	230~300V
Undervoltage(<U)setting range	210~140V
Rated current	40/63A(subject to protect label)
>U and <U trip delay	0.5S
Reset/start delay	1~600S
Voltage measurement accuracy	2%(Not exceeding 2% of the overall range)
Rated insulation voltage	400V
Output contact	1NO
Electrical life	10 ⁵
Mechanical life	10 ⁵
Protection degree	Ip20
Pollution degree	3
Altitude	≤2000m
Operating temperature	-50℃~55℃
Humidity	≤50%at40℃(without condensation)
Storage temperature	-30℃~70℃


● Default setting

Technical parameter	Setting range	Step	Factory setting
Overvoltage trip value	230~300V	1V	280V
Undervoltage trip value	210~140V	1V	160V
Overcurrent trip value	1~40/63A	0.1A	40/63A
Reset/start delay	1~600S	1S	5S
Continuous overcurrent protect times	A01~A20/OFF	A01	oFF

Current specification	15A	25A	32A	50A	63A
Rated operating current(In,A)	15	25	32	50	63
Maximum operating current I _{max} (A, within 10min)	25	30	40	60	80
Max. power of load(kW)	3.6	5.5	7	11	13.9



● Function setting

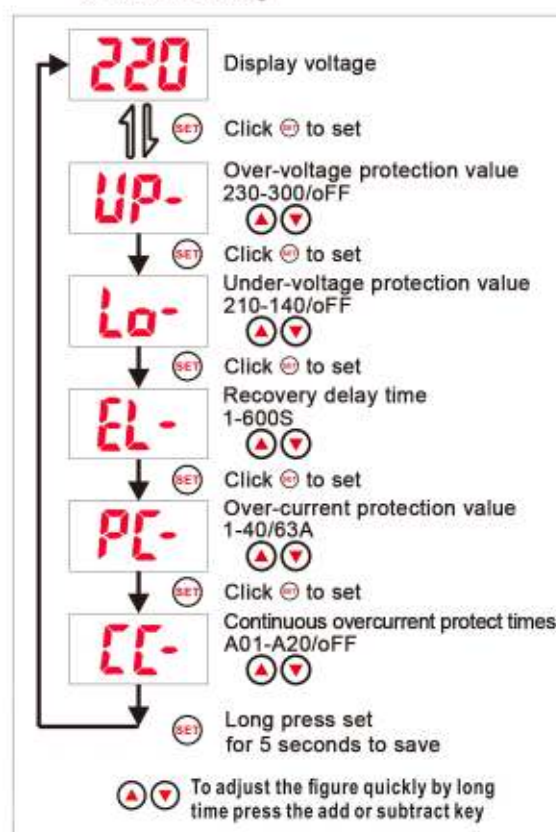

● Wiring and shape dimensions

