


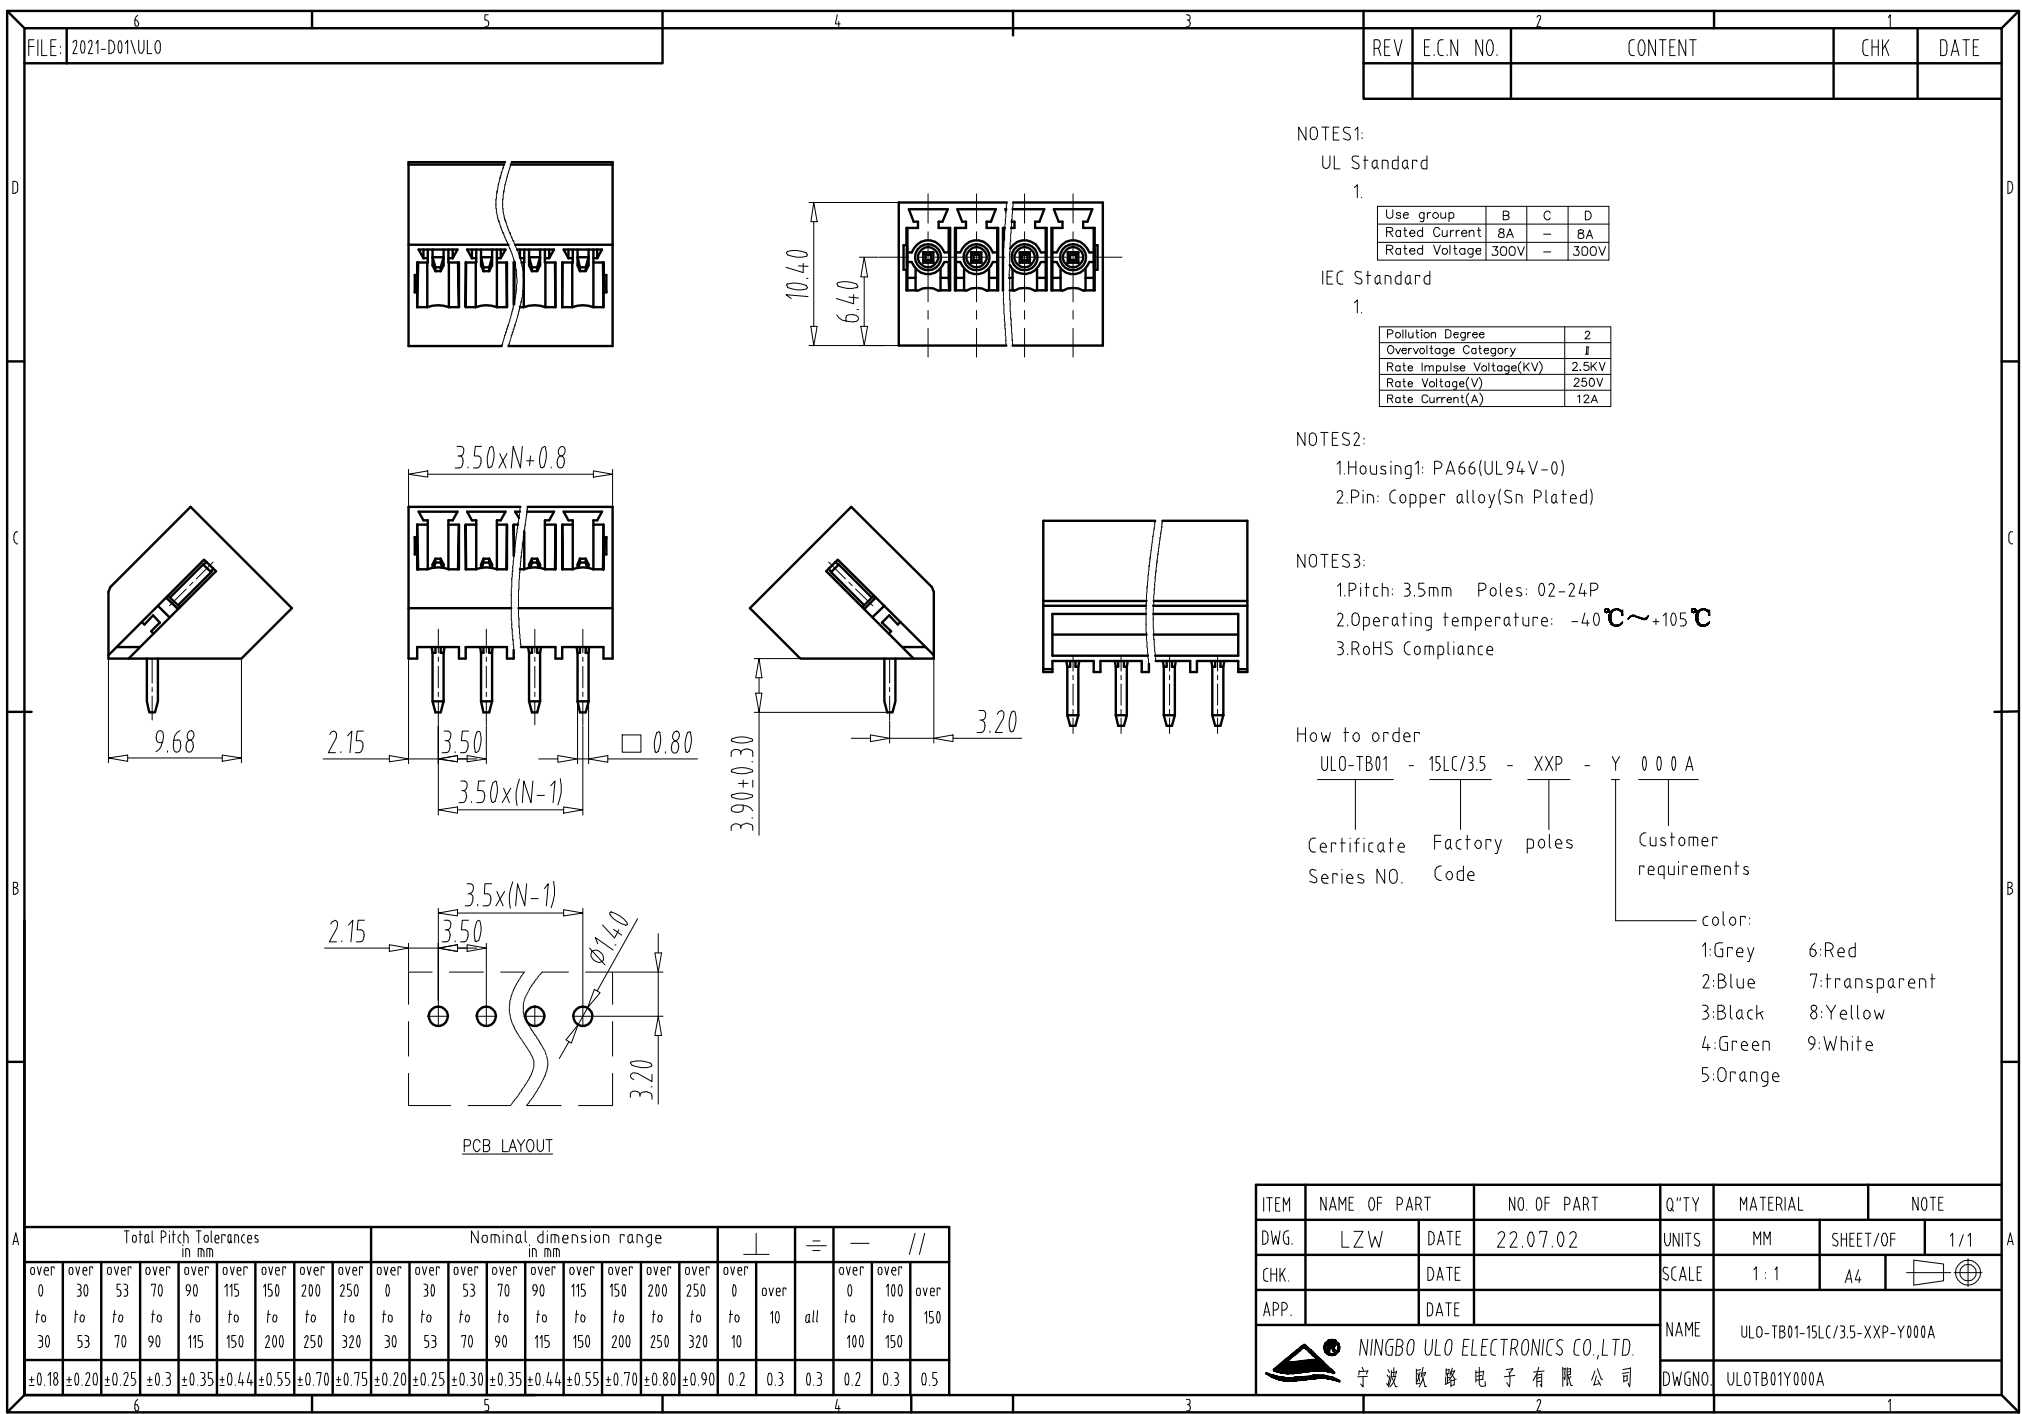

FILE: 2021-D01\UL0

| REV | E.C.N NO. | CONTENT | CHK | DATE |
|-----|-----------|---------|-----|------|
|     |           |         |     |      |

NOTES1:

UL Standard

1.

| Use group     | B    | C | D    |
|---------------|------|---|------|
| Rated Current | 8A   | - | 8A   |
| Rated Voltage | 300V | - | 300V |

IEC Standard

1.

|                          |       |
|--------------------------|-------|
| Pollution Degree         | 2     |
| Overvoltage Category     | II    |
| Rate Impulse Voltage(KV) | 2.5KV |
| Rate Voltage(V)          | 250V  |
| Rate Current(A)          | 12A   |

NOTES2:

1.Housing1: PA66(UL94V-0)

2.Pin: Copper alloy(Sn Plated)

NOTES3:

1.Pitch: 3.5mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

UL0-TB01 - 15LC/3.5 - XXP - Y 0 0 0 A

Certificate

Factory

poles

Customer

Series NO.

Code

requirements

color:

1:Grey

6:Red

2:Blue

7:transparent

3:Black

8:Yellow

4:Green

9:White

5:Orange

| ITEM | NAME OF PART | NO. OF PART | Q"TY     | MATERIAL | NOTE                        |
|------|--------------|-------------|----------|----------|-----------------------------|
| DWG. | LZW          | DATE        | 22.07.02 | UNITS    | MM                          |
| CHK. |              | DATE        |          | SCALE    | 1:1                         |
| APP. |              | DATE        |          |          |                             |
|      |              |             |          | NAME     | UL0-TB01-15LC/3.5-XXP-Y000A |
|      |              |             |          | DWGNO.   | UL0TB01Y000A                |



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司