
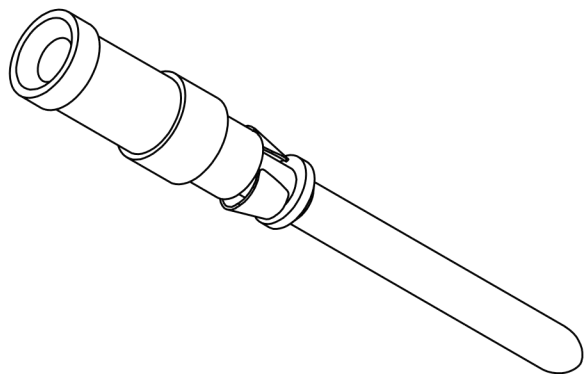


Part Code	Wire gauge		d	D	Stripping length
	mm ²	AWG			
CDSM-0.37	0.14~0.37	26-22	0.9	2.6	8mm
CDSM-0.5	0.5	20	1.1	2.6	8mm
CDSM-0.75	0.75	18	1.3	2.6	8mm
CDSM-1.0	1.0	18	1.45	2.6	8mm
CDSM-1.5	1.5	16	1.75	3.0	8mm
CDSM-2.5	2.5	14	2.25	3.2	8mm

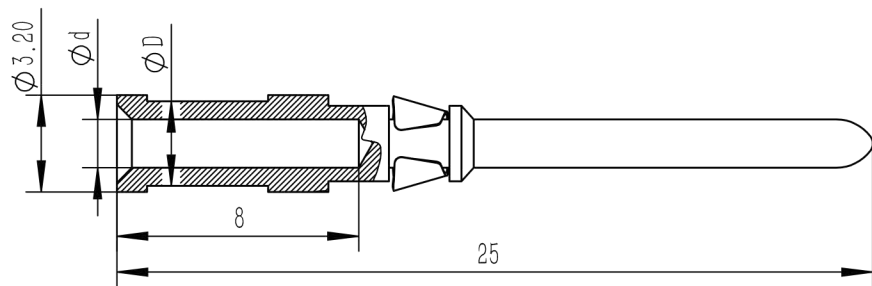


技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 10A
- 接触电阻: ≤3mΩ
- 线径范围: 0.14–2.5mm²(26–14 AWG)
- 可插拔次数: ≥500

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 10A
- Contact resistance: ≤3mΩ
- Wire gauge: 0.14–2.5mm²(26–14 AWG)
- Mating cycles: ≥500

		订货号 Order No.	
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0	0.6g	1:1	CDSM-XX
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			