







产品性能 Products Specification


插座类型 Socket type		41F-1Z-C2	41F-1Z-C2N
额定负载 Rated Load	电流 Current	6A	
	电压 Voltage	250V	
介质耐压 Dielectric Strength		4000V/S 线圈/触点 Coil/contact 2500V/S 触点间 Between contacts	
螺钉扭矩 Screw torque		0.5Nm	
外连接导线 External connection wire		20-16/0.5-1.5AWG/MM ²	
使用环境 Ambient temperature		-40℃ ~ +70℃	
重量 Weight		22g	24g

端子配置内部连接 Wiring Diagram




外形尺寸、安装尺寸 Outline dimensions/Mount dimensions(mm)

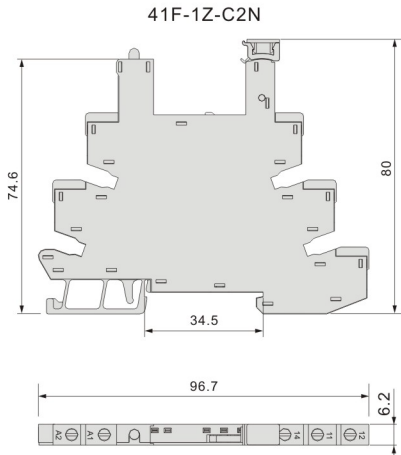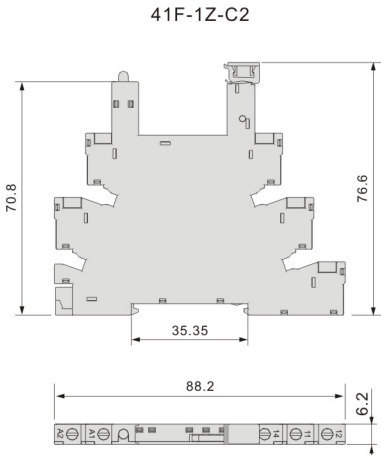



UL CE

41F-1Z-C4




CE

41F-1Z-C4N

产品性能 Products Specification


插座类型 Socket type		41F-1Z-C4	41F-1Z-C4N
额定负载 Rated Load	电流 Current	6A	
	电压 Voltage	250V	
介质耐压 Dielectric Strength		4000V/S 2500V/S	线圈/触点 Coil/contact 触点间 Between contacts
螺钉扭矩 Screw torque			
外连接导线 External connection wire		20-16/0.5-1.5AWG/MM ²	
使用环境 Ambient temperature		-40℃ ~ +70℃	
重量 Weight		22g	24g

端子配置内部连接 Wiring Diagram




外形尺寸、安装尺寸 Outline dimensions/Mount dimensions(mm)

41F-1Z-C4

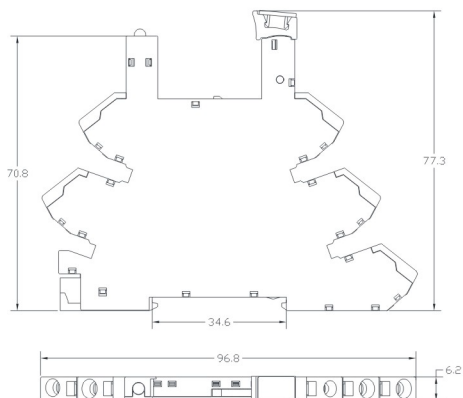


41F-1Z-C4N

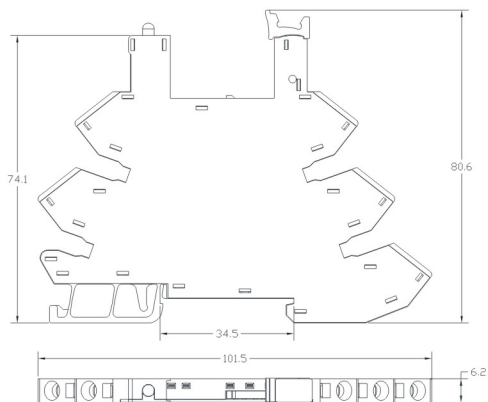


插座型号 Type	额定电压 Rated voltage	额定电流 Rated current	环境温度 Temperature	继电器线圈输入电压 Input voltae	适用继电器额定电压 Apply to relay the rated voltage	输入电压极性 Input voltage polarity	螺钉扭矩 Screw torque	剥露导线长度 Stripped wire length
41F-1Z-C2-1	250VAC	6A	-40℃~70℃	(12~24)V AC/DC	(12~24)V AC/DC	无	0.5N.m	7mm
41F-1Z-C2-2	250VAC	6A	-40℃~70℃	(48~60)V AC/DC	(48~60)V AC/DC	无	0.5N.m	7mm
41F-1Z-C2-3	250VAC	6A	-40℃~55℃	(110~125)V AC/DC	60V DC	无	0.5N.m	7mm
41F-1Z-C2-4	250VAC	6A	-40℃~55℃	(220~240)V AC/DC	60V DC	无	0.5N.m	7mm
41F-1Z-C2-5	250VAC	6A	-40℃~70℃	(6~24)V DC	(6~24)V DC	有	0.5N.m	7mm
41F-1Z-C2N-1	250VAC	6A	-40℃~70℃	(12~24)V AC/DC	(12~24)V AC/DC	无	0.5N.m	7mm
41F-1Z-C2N-2	250VAC	6A	-40℃~70℃	(48~60)V AC/DC	(48~60)V AC/DC	无	0.5N.m	7mm
41F-1Z-C2N-3	250VAC	6A	-40℃~55℃	(110~125)V AC/DC	60V DC	无	0.5N.m	7mm
41F-1Z-C2N-4	250VAC	6A	-40℃~55℃	(220~240)V AC/DC	60V DC	无	0.5N.m	7mm
41F-1Z-C2N-5	250VAC	6A	-40℃~70℃	(6~24)V DC	(6~24)V DC	有	0.5N.m	7mm
41F-1Z-A	250VAC	6A	-40℃~70℃	(6~60)V DC	(6~60)V DC	有	-	-

连接桥 Jumper

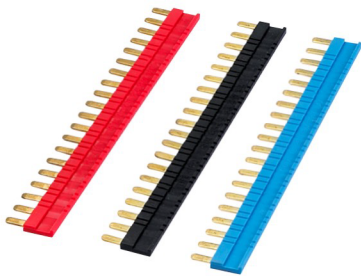

型号Model	颜色 color
41F-J1R	红 Red
41F-J1	黑 Black
41F-J1B	蓝 blue

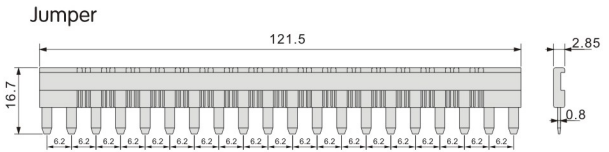

41F-M



41F-M1

