FILE: 21.06.03

REV	E.C.N NO.	CONTENT	CHK	DATE

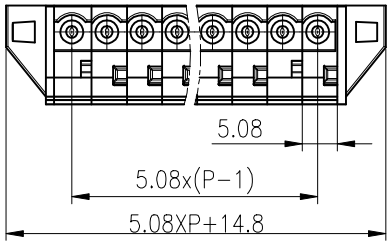



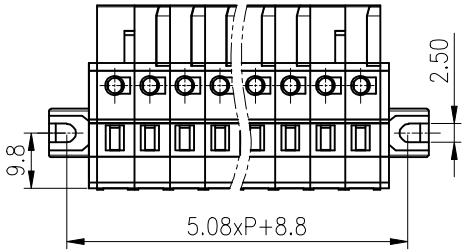



NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	–	–
Rated Voltage	300V	–	–

2.Wire range: 24～14AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	Ⅲ
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	16A

2.wire range: 0.2-2.5mm²

NOTES2:

1.Pitch:5.08mm Poles: 02-24P

2.Stripping length: 8-9mm

3.Operating temperature: -40℃～+105℃

4.RoHS Compliance

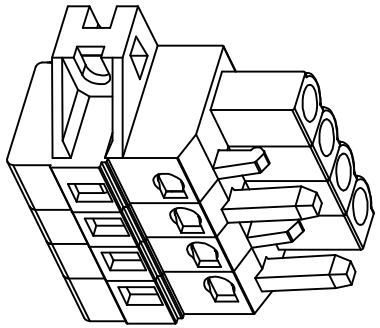

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥		⫨	—	//	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE
DWG.	/	DATE	/	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME	ULO-TB450-8KMA-5.08-XXP		
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.	X		